


TECHNICAL DATA	
Max. operating pressure:	350 bar
Rated flow:	30 l/min
Cavity-Tooling:	08W-3
Installation torque:	25 - 35 Nm
Weight:	0.159 (Z=L) kg
· Control Pilot Flow Approximately (0.25 LPM)	

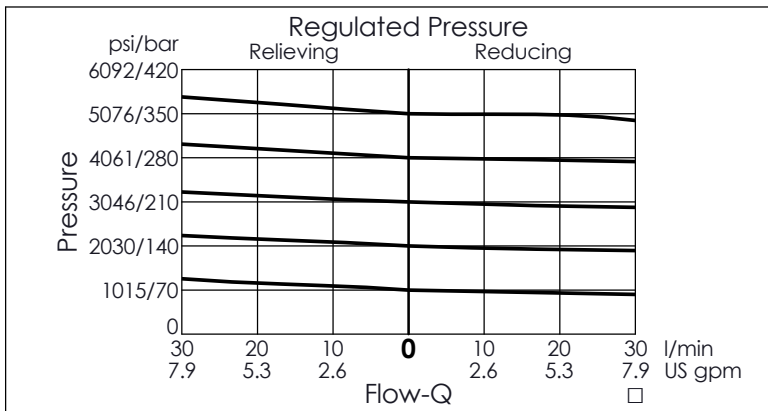

X	OPERATION	
36	Standard type	Low leakage

Y	SPRINGS	
ADJUSTMENT RANGES (X=30)(X=35)		
A	7 - 210 bar (14 bar Standard Setting)	Maximum Differential=210 bar
B	3.5 - 105 bar (14 bar Standard Setting)	Maximum Differential=210 bar
D	1.7 - 55 bar (14 bar Standard Setting)	Maximum Differential=140 bar
E	1.7 - 28 bar (14 bar Standard Setting)	Maximum Differential=140 bar
N	4 - 55 bar (14 bar Standard Setting)	Maximum Differential=140 bar
Q	4 - 28 bar (14 bar Standard Setting)	Maximum Differential=140 bar
W	10.5 - 315 bar (14 bar Standard Setting)	

· Any technical questions, please feel free to consult with our sales dept.

Z	OPTIONS	
L	Leakproof hex. socket screw.	
K	Handknob with Lock Knob. (Order Code: 7ZAK001)	