


TECHNICAL DATA	
Max. Operating pressure:	350 bar
Rated flow:	30 l/min (Max. flow refer to performance chart)
Cavity-Tooling:	08W-3
Installation torque:	25 - 35 Nm
Weight:	0.221 kg (Without Coil)
Coils must be ordered separately	
<ul style="list-style-type: none"> Maximum Leakage Approximately (30 cc/min./70 bar) Reseat exceeds 85% of cracking pressure. Hysteresis with DC input < 8% Hysteresis with dither < 4% Linearity with dither < 2% Dither should be adjustable between 80 - 300 Hz (Recommended dither frequency 85 Hz) 	

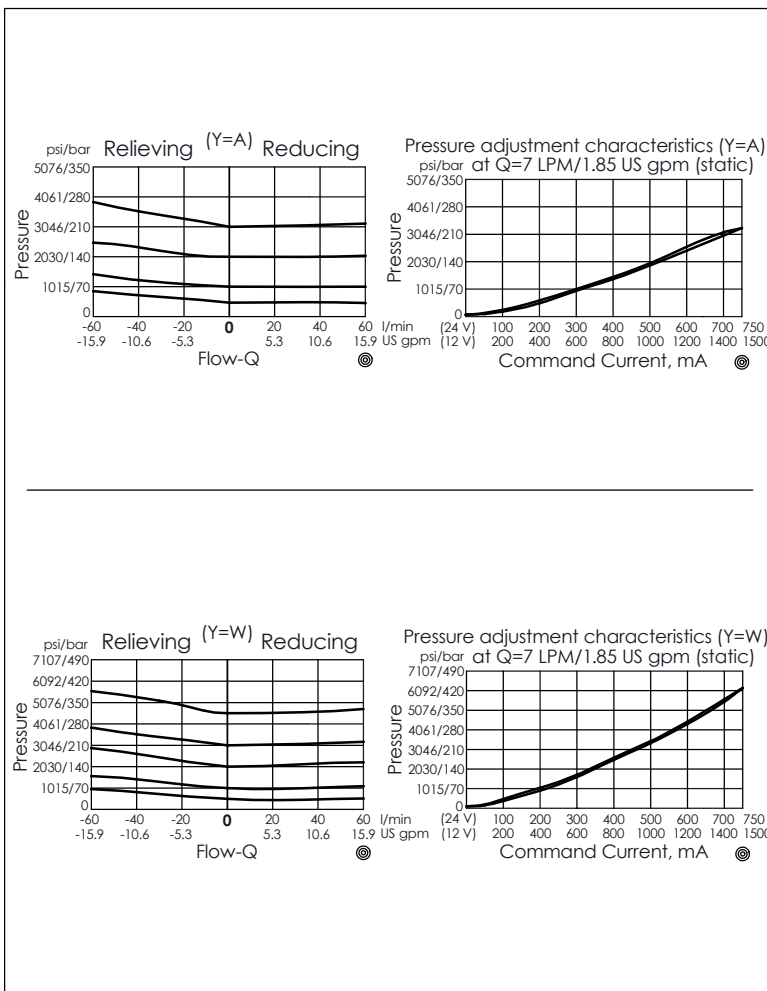

X	OPERATION	
3C	3 Ports · 26 Watt. Coil	
	Ø 16 mm tube	

Y	HIGH PRESSURE ADJUSTMENT RANGES (RECOMMEND PRESSURE RANGE)	
	Customer has to specify a relief setting that falls within the selected pressure range	
A	20 - 210 bar	
B	10.5 - 105 bar	
D	3.5 - 50 bar	
K	10 - 150 bar	
W	35 - 350 bar	
	If pressure control beyond the range is required, please contact the Winner sales department.	

Z	OPTIONS	
N	Non-adjustable	
P	Push Style Manual Override (Manual override is used for valve function check only, not for pressure control.)	