


TECHNICAL DATA	
Max.Operating pressure:	350 bar
Rated flow:	30 l/min
Cavity-Tooling:	08W-2
Installation torque:	25 - 35 Nm
Weight:	0.196 kg (Without Coil)
Coils must be ordered separately	
<ul style="list-style-type: none"> <li>Maximum Leakage Approximately (30 cc/min./70 bar)</li> <li>Reseat exceeds 85% of cracking pressure</li> <li>Hysteresis with DC input &lt; 8%</li> <li>Hysteresis with dither &lt; 4%</li> <li>Linearity with dither &lt; 2%</li> <li>Dither should be adjustable between 80 - 300 Hz (Recommended dither frequency 85 - 300 Hz)</li> </ul>	

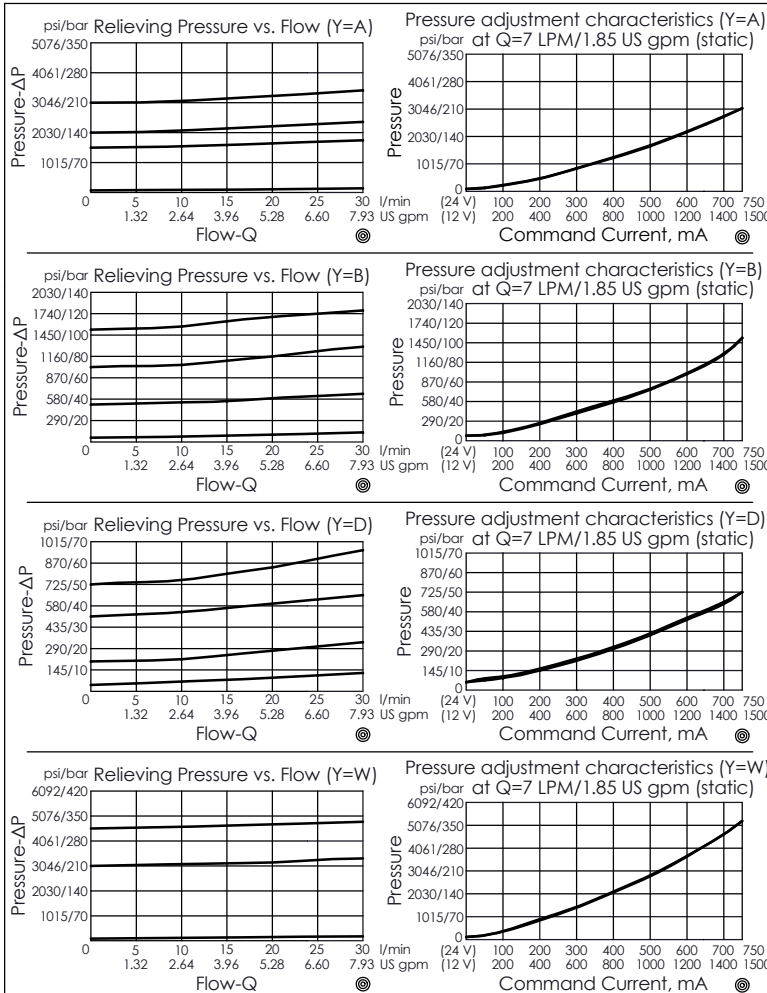

X	OPERATION	
2C	2 Ports · 26 Watt. Coil	
	Ø 16 mm tube	

Y	HIGH PRESSURE ADJUSTMENT RANGES (RECOMMEND PRESSURE RANGE)	
	Customer has to specify a relief setting that falls within the selected pressure range	
A	20 - 210 bar	
B	10.5 - 105 bar	
D	3.5 - 50 bar	
W	35 - 350 bar	

· If pressure control beyond the range is required, please contact the Winner sales department.

Z	OPTIONS	
P	Push Style Manual Override (Manual override is used for valve function check only, not for pressure control.)	