


TECHNICAL DATA	
Max. Operating pressure:	350 bar
Rated flow:	95 l/min
Cavity-Tooling:	10W-2
Installation torque:	35 - 45 Nm
Weight:	0.239 kg (Without Coil)
Coils must be ordered separately	
<ul style="list-style-type: none"> Maximum Leakage Approximately (30 cc/min./70 bar) Reseat exceeds 85% of cracking pressure Hysteresis with DC input < 8% Hysteresis with dither < 4% Linearity with dither < 2% Dither should be adjustable between 80 - 300 Hz (Recommended dither frequency 140 Hz) 	

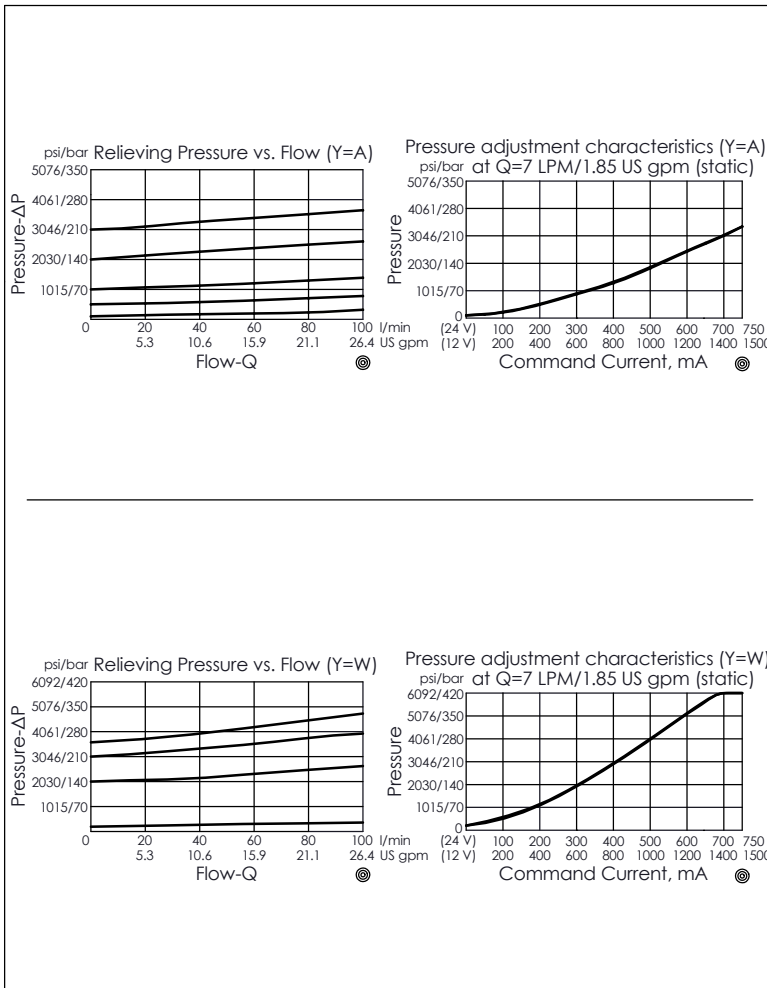

X	OPERATION	
2C	2 Ports · 26 Watt. Coil	
	∅ 16 mm tube	

Y	HIGH PRESSURE ADJUSTMENT RANGES (RECOMMEND PRESSURE RANGE)	
	Customer has to specify a relief setting that falls within the selected pressure range	
A	20 - 210 bar	
B	10.5 - 105 bar	
D	3.5 - 50 bar	
W	35 - 350 bar	

· If pressure control beyond the range is required, please contact the Winner sales department.

Z	OPTIONS	
N	Non-adjustable	