

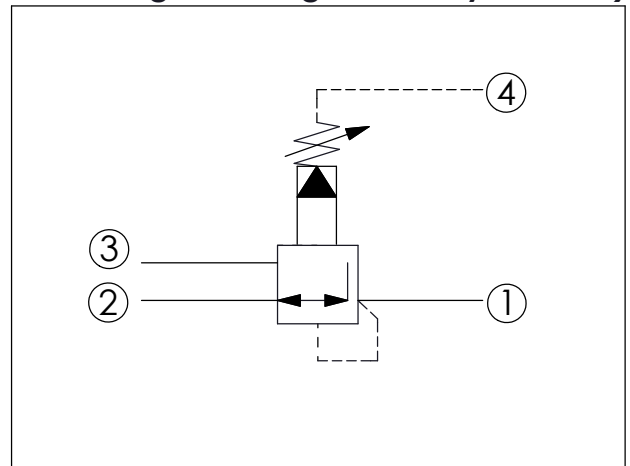


REDUCING/RELIEVING VALVE (Pilot Operated Reducing/Relieving, Externally Drained)

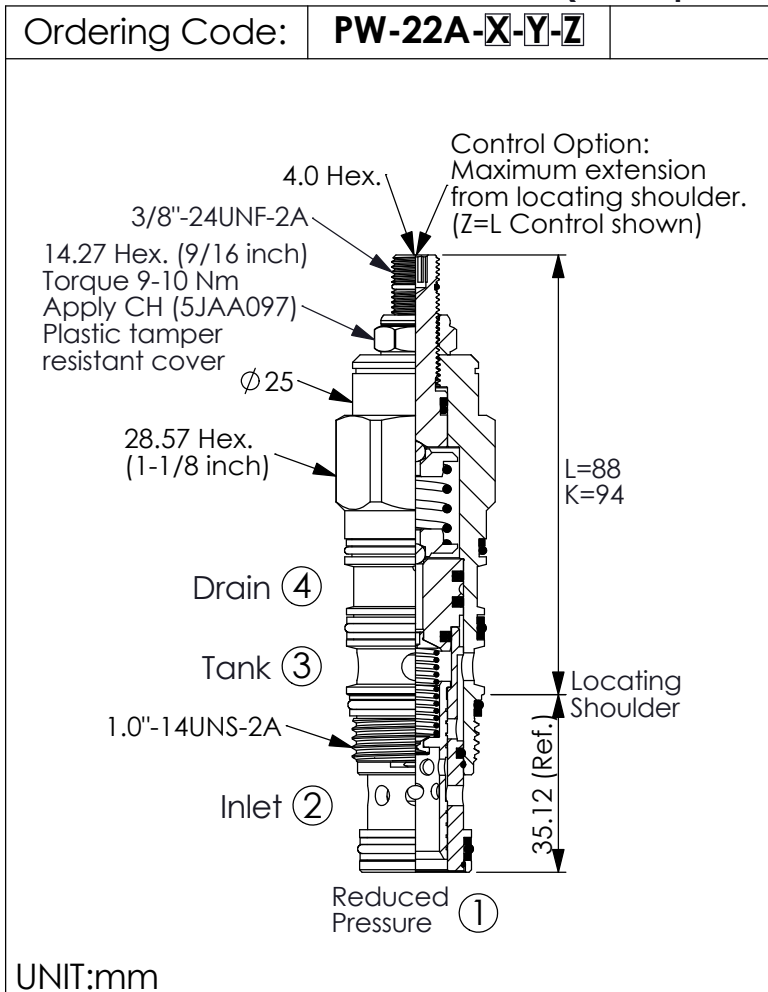

TECHNICAL DATA	
Max.Operating pressure:	350 bar
Rated flow:	80 l/min
Cavity-Tooling:	22A-4
Installation torque:	60-70 Nm
Weight:	0.34 (Z=L) kg
· Control Pilot Flow (0.16-0.25 L/min.)	

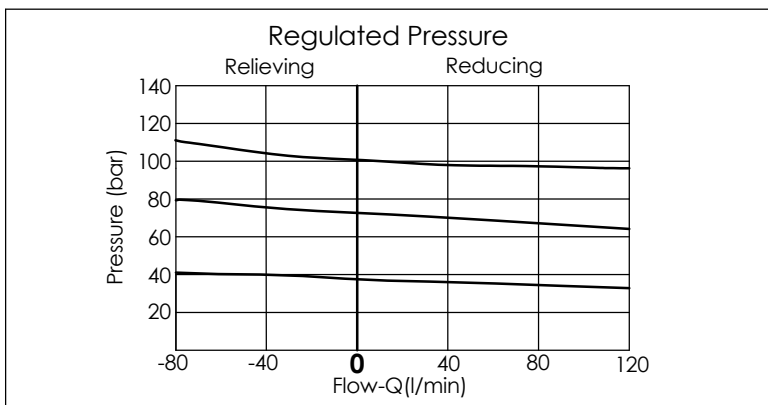

Y	SPRINGS	
	ADJUSTMENT RANGES (X=40) (X=45)	
A	7-210 bar (14 bar Standard Setting)	Maximum Differential=210 bar
B	3.5-105 bar (14 bar Standard Setting)	Maximum Differential=210 bar
D	1.7-55 bar (14 bar Standard Setting)	Maximum Differential=140 bar
E	1.7-28 bar (14 bar Standard Setting)	Maximum Differential=140 bar
H	2-210 bar (14 bar Standard Setting)	Maximum Differential=210 bar
N	4-55 bar (14 bar Standard Setting)	Maximum Differential=140 bar
Q	4-28 bar (14 bar Standard Setting)	Maximum Differential=140 bar
W	10.5-315 bar (14 bar Standard Setting)	

* When X = 43, the lowest pressure will be a bit higher than standard.
· Any technical questions, please feel free to consult with our sales dept.

X	OPERATION	
40	Standard type Low leakage	
*43	Very good pressure control Improved dynamic response	
45	Impact resistant type Low leakage without filter	

Z	OPTIONS	
L	Leakproof hex. socket screw.	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	
C	Stainless Steel Tamper Resistant Cover.	