


TECHNICAL DATA	
Max. Operating pressure:	350 bar
Rated flow:	40 l/min
Cavity-Tooling:	21A-4
Installation torque:	40-50 Nm
Weight:	0.129 kg
<ul style="list-style-type: none"> <li>Control Pilot Flow (0.11-0.16 L/min.)</li> <li>If any specific pressure is needed, please consult our sales department.</li> </ul>	

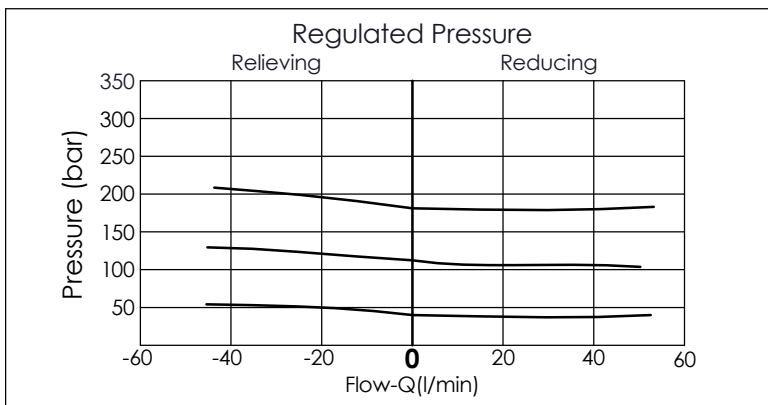

X	OPERATION	
40	Standard type	Low leakage
*43	Very good pressure control	Improved dynamic response
45	Impact resistant type	Low leakage without filter

Y	SPRINGS	
	MINIMUM CONTROL PRESSURE	
D	1.7 bar (25 psi)	
W	7 bar (100 psi)	
	Maximum inlet pressure is determined by the bias spring. The D spring is limited to 140 bar (2000 psi) maximum differential pressure and the W spring is limited to 350 bar (5000 psi) maximum inlet pressure.	

Z	CAVITIES	
8	8A-2 Cavity	
	<ul style="list-style-type: none"> <li>Proportional valve applications: please refer to <b>PRA-8A-2D-Y-Z-74</b> · <b>PRB-8A-2D-Y-Z</b></li> <li>Any technical questions, please feel free to consult with our sales dept.</li> </ul>	