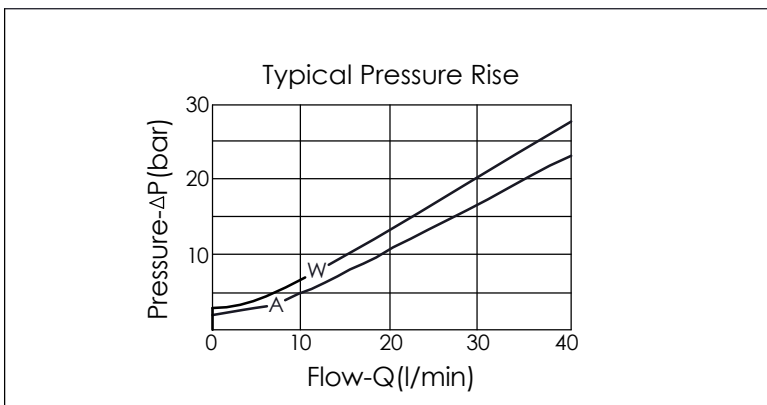





TECHNICAL DATA	
Max. Operating pressure:	250 bar
Rated flow:	40 l/min
Cavity-Tooling:	10W-2
Installation torque:	35 - 45 Nm
Weight:	0.23 kg
Will accept maximum pressure at port ② ; suitable for use in cross port relief circuits.	



X	OPERATION
20	① to ② (P to T)
<ul style="list-style-type: none"> Response Time-Typical (2 ms) Maximum Leakage Approximately (5 drops/min. to 85% of nominal setting) Dirt tolerant 	

Y	PRESSURE SETTING
A	17 - 210 bar (70 bar Standard Setting)
W	17 - 250 bar (70 bar Standard Setting)

Z	OPTIONS
L	Leakproof hex. socket screw. 
C	Stainless Steel Tamper Resistant Cover. 
T	Three-winged Handknob Kit. 
K	Handknob with Lock Knob. (Order Code: 6ZAK001) 