

TECHNICAL DATA

Max. Operating pressure: 350 bar

Rated flow: 200 l/min





Cavity-Tooling: 3A-2

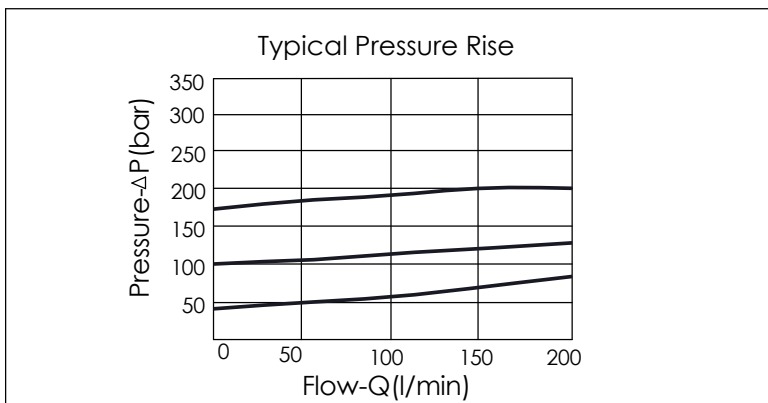
Installation torque: 60 - 70 Nm

Weight: 0.30 (Z=L,LP) kg

Will accept maximum pressure at port ② ; suitable for use in cross port relief circuits.

X	OPERATION
25	Direct Acting ① to ② (P to T)
	<ul style="list-style-type: none"> Response Time-Typical (2 ms) Maximum Leakage Approximately (5 drops/min. to 85% of nominal setting) Dirt tolerant

Z	OPTION
L	Leakproof hex. socket screw. 
LP	Leakproof hex. socket screw. With stainless steel external metal components (Buna-N Seal) 
C	Stainless Steel Tamper Resistant Cover. 
K	Handknob with Lock Knob. (Order Code: 6ZAK001) 



Y	PRESSURE SETTING
A	35 - 210 bar (70 bar Standard Setting)
B	20 - 105 bar (70 bar Standard Setting)
C	70 - 420 bar (70 bar Standard Setting)
D	14 - 55 bar (28 bar Standard Setting)
E	7 - 28 bar (14 bar Standard Setting)
S	3.5 - 14 bar (7 bar Standard Setting)
W	55 - 315 bar (70 bar Standard Setting)