


TECHNICAL DATA		
Max. pressure:	350	bar
Rated flow:	60	l/min
Cavity-Tooling:	3A-2	
Installation torque:	60 - 70	Nm
Weight:	0.24 (Z=L) 0.27 (Z=BA)	kg

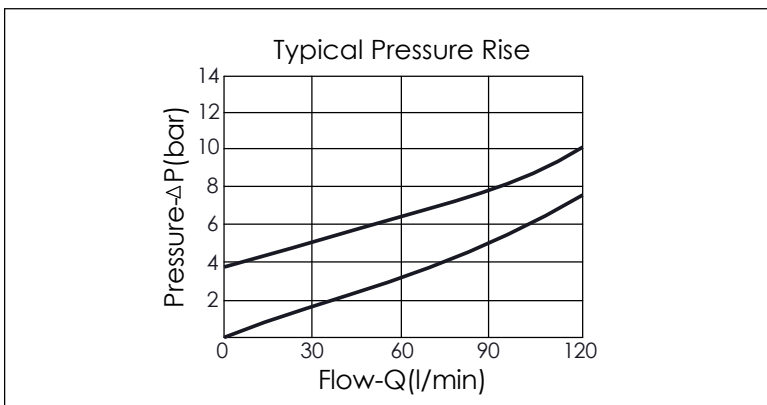

X	OPERATION	
27	Direct Acting	
	(1) to (2) (P to T)	
	<ul style="list-style-type: none"> <li>Response Time-Typical (2 ms)</li> <li>Maximum Leakage Approximately (50 cc/min./70 bar)</li> </ul>	

Y	PRESSURE SETTING	
35	0 - 3.5 bar (1 bar Standard Setting)	
70	0 - 7.0 bar (3 bar Standard Setting)	

Z	OPTION	
L	Leakproof hex. socket screw.	
BA	Handknob and aluminum locknut.	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	