


TECHNICAL DATA	
Max. Operating pressure:	350 bar (Refer to performance chart)
Rated flow:	30 l/min (Refer to performance chart)
Cavity-Tooling:	08W-2 (Refer to recommend dimension)
Installation torque:	39 - 51 Nm
Weight:	0.149 (Z=L) 0.19 (Z=T) kg

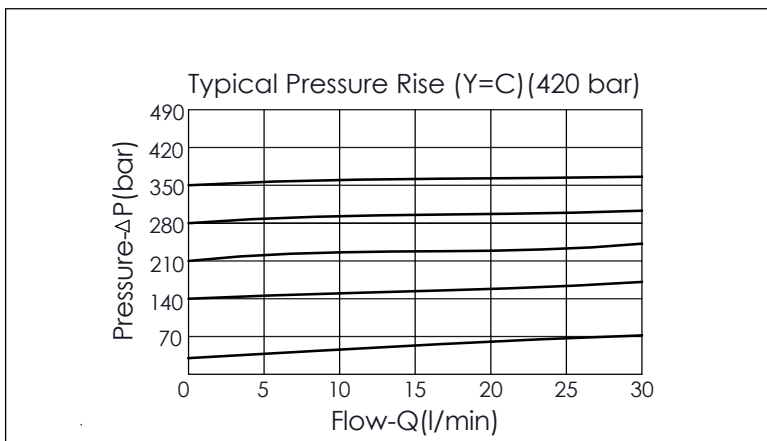

X	OPERATION	
22	Direct Acting, Guided Poppet Type	
<ul style="list-style-type: none"> Low noise very good pressure control Maximum Leakage Approximately (5 drops/min. to 85% of nominal setting) 		

Y	SPRINGS	
A	40 - 210 bar	(140 bar Standard Setting)
C	120 - 420 bar	(140 bar Standard Setting)
W	40 - 280 bar	(70 bar Standard Setting)

Z	OPTIONS	
L	Leakproof hex. socket screw.	
T	Three-winged Handknob Kit.	