

TECHNICAL DATA

Max. Operating pressure: 350 bar
(Refer to performance chart)


Rated flow: 35 l/min
(Refer to performance chart)

Max. flow: 50 l/min ($\Delta P > 100$ bar)
(Refer to performance chart)

Cavity-Tooling: 28M-2

Installation torque: 75 - 85 Nm

Weight: 0.37 (Z=L) kg

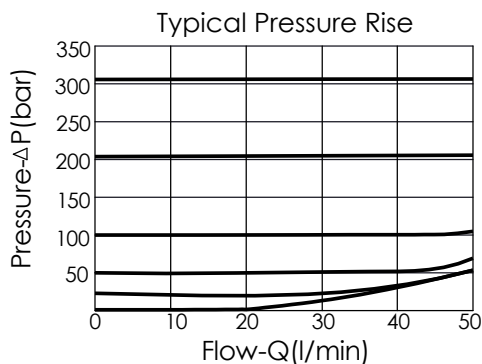

X	OPERATION	
22	Direct Acting Guided Poppet Type	
<ul style="list-style-type: none"> Maximum Leakage Approximately (5 drops/min. to 85% of nominal setting) 		

Y	SPRINGS	
A	Pressure setting up to 210 bar (70 bar Standard Setting)	
B	Pressure setting up to 105 bar (70 bar Standard Setting)	
D	Pressure setting up to 55 bar (28 bar Standard Setting)	
W	Pressure setting up to 315 bar (70 bar Standard Setting)	

Z	OPTIONS	
L	Leakproof hex. socket screw.	
T	Three-winged Handknob Kit.	
CB	Plastic Tamper Resistant Cover (Order Code:5JAA093)	