

TECHNICAL DATA

Max. Operating pressure: 350 bar
(Refer to performance chart)


Rated flow: 70 l/min
(Refer to performance chart)

Max. flow: 120 l/min ($\Delta P > 100$ bar)
(Refer to performance chart)

Cavity-Tooling: 35M-2

Installation torque: 140 - 160 Nm

Weight: 0.50 (Z=L) kg

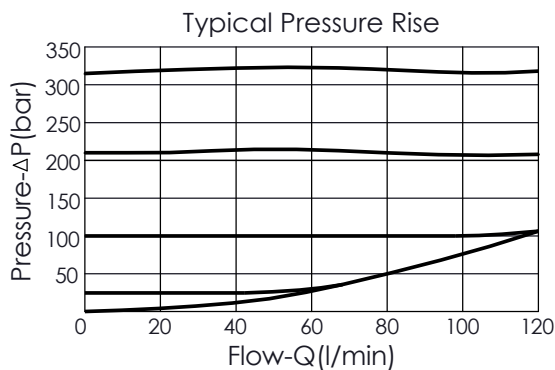

X OPERATION

22 Direct Acting Guided Poppet Type

· Maximum Leakage Approximately
(5 drops/min. to 85% of nominal setting)

Y SPRINGS

A Pressure setting up to 210 bar
(70 bar Standard Setting)


B Pressure setting up to 105 bar
(70 bar Standard Setting)

D Pressure setting up to 55 bar
(28 bar Standard Setting)


W Pressure setting up to 315 bar
(70 bar Standard Setting)

Z OPTIONS

L Leakproof hex.
socket screw.



T Three-winged
Handknob Kit.



CB Plastic Tamper
Resistant Cover
(Order Code:5JAA093)

