


### TECHNICAL DATA

Max. Setting:	420	bar
(Refer to performance chart)		
Max. pressure port ② (T):	250	bar
Max. flow:	60	l/min
(Refer to performance chart)		
Cavity-Tooling:	10A-2	
(Refer to recommend dimension)		
Installation torque:	40 - 50	Nm
Weight:	0.154 (Z=L)	kg

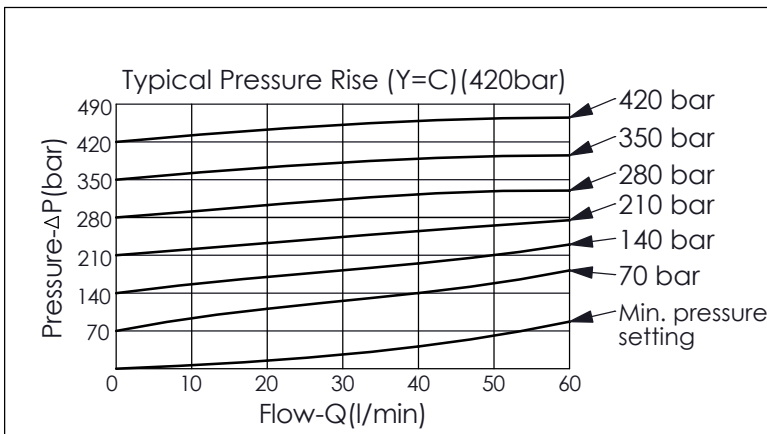

X	OPERATION	
22	Direct Acting Guided Poppet Type	
• Maximum Leakage Approximately ( 5 drops/min. to 85% of nominal setting)		

Y	SPRINGS	
A	Pressure setting up to 210 bar (70 bar Standard Setting)	
B	Pressure setting up to 105 bar (70 bar Standard Setting)	
C	Pressure setting up to 420 bar (70 bar Standard Setting)	
D	Pressure setting up to 55 bar (28 bar Standard Setting)	
E	Pressure setting up to 28 bar (14 bar Standard Setting)	
W	Pressure setting up to 315 bar (70 bar Standard Setting)	
• If you need higher pressure setting, please consult our sales department.		

Z	OPTIONS	
L	Leakproof hex. socket screw.	
CB	Plastic Tamper Resistant Cover (Order Code:5JAA093)	
T	Three-winged Handknob Kit.	