


TECHNICAL DATA	
Max. Setting:	420 bar (Refer to performance chart)
Max. flow:	60 l/min (Refer to performance chart)
Cavity-Tooling:	10W-2 (Refer to recommend dimension)
Installation torque:	44 - 56 Nm
Weight:	0.25 (Z=L) kg
· Max. pressure port ② (T): 250 bar	

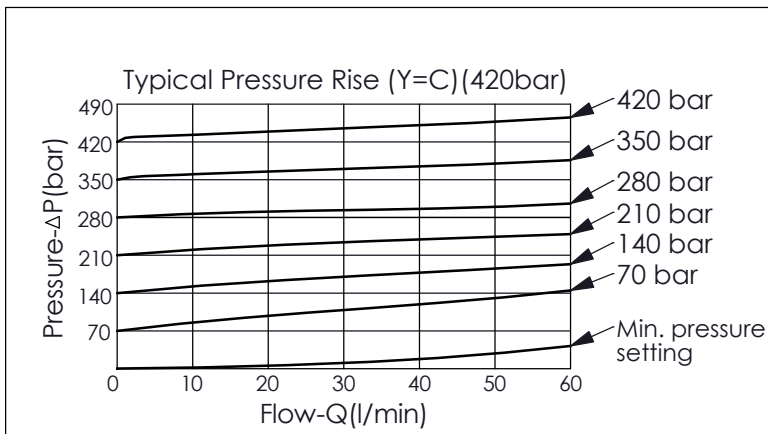

X	OPERATION	
22	Direct Acting, Guided Poppet Type	
· Low noise very good pressure control · Maximum Leakage Approximately (5 drops/min. to 85% of nominal setting)		

Y	SPRINGS	
A	Pressure setting up to 210 bar (70 bar Standard Setting)	
B	Pressure setting up to 105 bar (70 bar Standard Setting)	
C	Pressure setting up to 420 bar (70 bar Standard Setting)	
D	Pressure setting up to 55 bar (28 bar Standard Setting)	
E	Pressure setting up to 28 bar (14 bar Standard Setting)	
W	Pressure setting up to 315 bar (70 bar Standard Setting)	
· If you need higher pressure setting, please consult our sales department.		

Z	OPTIONS	
L	Leakproof hex. socket screw.	
CB	Plastic Tamper Resistant Cover (Order Code:5JAA098)	
· If you need handknob, please contact Winner's sales department.		