


TECHNICAL DATA	
Max. Operating pressure:	350 bar
Rated flow:	380 l/min
Cavity-Tooling:	16A-2
Installation torque:	200 - 215 Nm
Weight:	0.53 (Z=L) kg
Will accept maximum pressure at port ②; suitable for use in cross port relief circuits. If used in cross port relief circuits, consider spool leakage.	

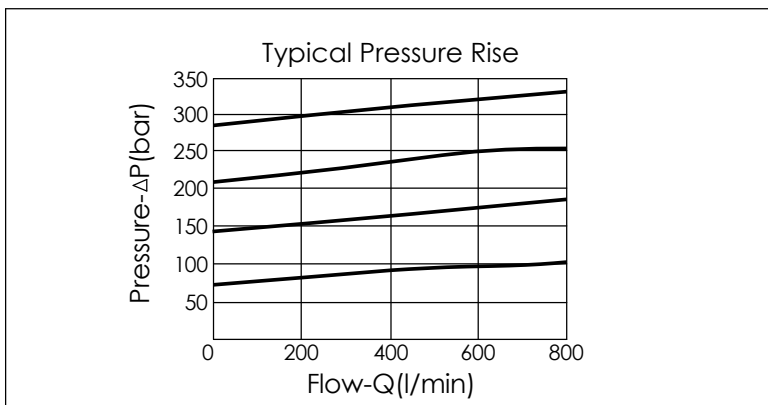

X	OPERATION
22	Pilot Operated ① to ② (P to T)
<ul style="list-style-type: none"> Response Time-Typical (2 ms) Maximum Leakage Approximately (66 cc/min./70 bar) 	

Y	SPRINGS	
	ADJUSTMENT RANGES	
A	7 - 210 bar	(70 bar Standard Setting)
B	3.5 - 105 bar	(70 bar Standard Setting)
C	10.5 - 420 bar	(70 bar Standard Setting)
D	1.7 - 55 bar	(28 bar Standard Setting)
E	1.7 - 28 bar	(14 bar Standard Setting)
N	4 - 55 bar	(28 bar Standard Setting)
Q	4 - 28 bar	(14 bar Standard Setting)
W	10.5 - 315 bar	(70 bar Standard Setting)

Z	OPTIONS	
L	Leakproof hex. socket screw.	
LP	Leakproof hex. socket screw. With stainless steel external metal components	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	
C	Stainless Steel Tamper Resistant Cover.	