


TECHNICAL DATA

Max. Operating pressure:	350	bar
Rated flow:	200	l/min
Cavity-Tooling:	3A-2	
Installation torque:	60 - 70	Nm
Weight:	0.26 (Z=L)	kg

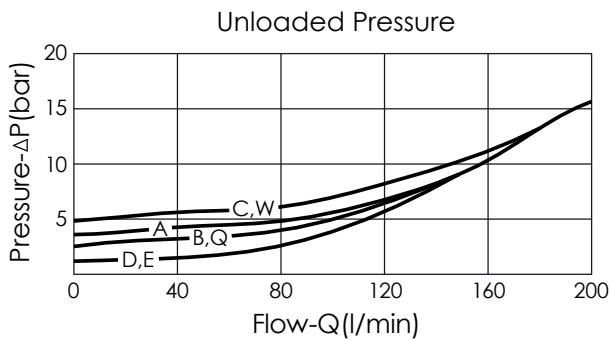

X OPERATION

20 Standard Type

· Maximum Leakage Approximately
(50 cc/min./70 bar)

Y

SPRINGS

ADJUSTMENT RANGES

A	7 - 210 bar (70 bar Standard Setting)
B	3.5 - 105 bar (70 bar Standard Setting)
C	10.5 - 420 bar (70 bar Standard Setting)
D	1.7 - 55 bar (28 bar Standard Setting)
E	1.7 - 28 bar (14 bar Standard Setting)
N	4 - 55 bar (28 bar Standard Setting)
Q	4 - 28 bar (14 bar Standard Setting)
W	10.5 - 315 bar (70 bar Standard Setting)

Z

OPTIONS

L	Leakproof hex. socket screw.	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	
C	Stainless Steel Tamper Resistant Cover.	