


### TECHNICAL DATA

Max. Operating pressure:	350 bar	
Rated flow:	380	l/min
Cavity-Tooling:	16A-2	
Installation torque:	200 - 215	Nm
Weight:	0.53 (Z=L)	kg

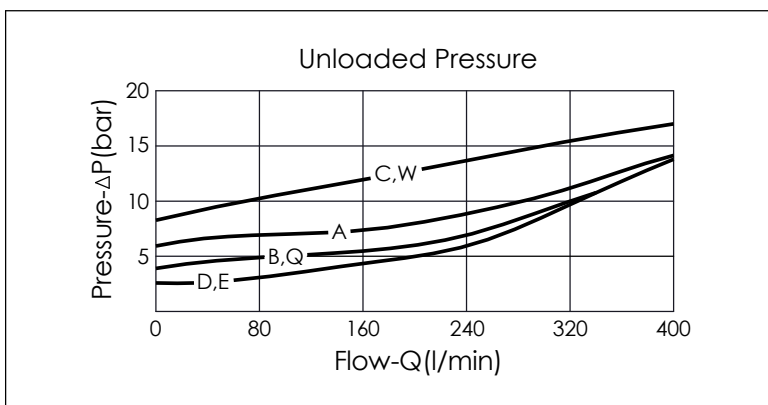

X	OPERATION	
20	Standard Type	
• Maximum Leakage Approximately (65 cc/min./70 bar)		

Y	SPRINGS	
	ADJUSTMENT RANGES	
A	7 - 210 bar	(70 bar Standard Setting)
B	3.5 - 105 bar	(70 bar Standard Setting)
C	10.5 - 420 bar	(70 bar Standard Setting)
D	1.7 - 55 bar	(28 bar Standard Setting)
E	1.7 - 28 bar	(14 bar Standard Setting)
N	4 - 55 bar	(28 bar Standard Setting)
Q	4 - 28 bar	(14 bar Standard Setting)
W	10.5 - 315 bar	(70 bar Standard Setting)

Z	OPTIONS	
L	Leakproof hex. socket screw.	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	
C	Stainless Steel Tamper Resistant Cover.	