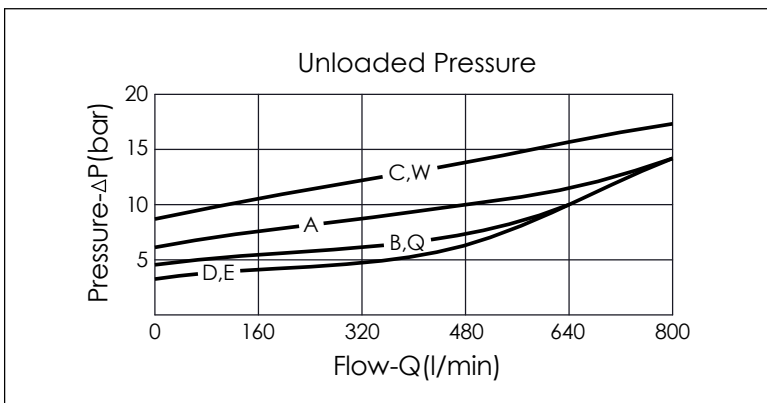




### TECHNICAL DATA

Max. Operating pressure:	350 bar
Rated flow:	760 l/min
Cavity-Tooling:	18A-2 (18AB-2)
Installation torque:	465 - 500 Nm
Weight:	1.16 (Z=L) kg



X	OPERATION
20	Standard Type
· Maximum Leakage Approximately (80 cc/min./70 bar)	

Y	SPRINGS	
	ADJUSTMENT RANGES	
A	7 - 210 bar	(70 bar Standard Setting)
B	3.5 - 105 bar	(70 bar Standard Setting)
C	10.5 - 420 bar	(70 bar Standard Setting)
D	1.7 - 55 bar	(28 bar Standard Setting)
E	1.7 - 28 bar	(14 bar Standard Setting)
N	4 - 55 bar	(28 bar Standard Setting)
Q	4 - 28 bar	(14 bar Standard Setting)
W	10.5 - 315 bar	(70 bar Standard Setting)

Z	OPTIONS
L	Leakproof hex. socket screw. 
K	Handknob with Lock Knob. (Order Code: 6ZAK001) 
C	Stainless Steel Tamper Resistant Cover. 