


TECHNICAL DATA	
Max. Operating pressure:	350 bar
Rated flow:	240 l/min
Cavity-Tooling:	17A-3
Installation torque:	200-215 Nm
Weight:	0.49 kg
Will accept maximum pressure at port (2); suitable for use in cross port relief circuits. If used in cross port relief circuits, consider spool leakage.	

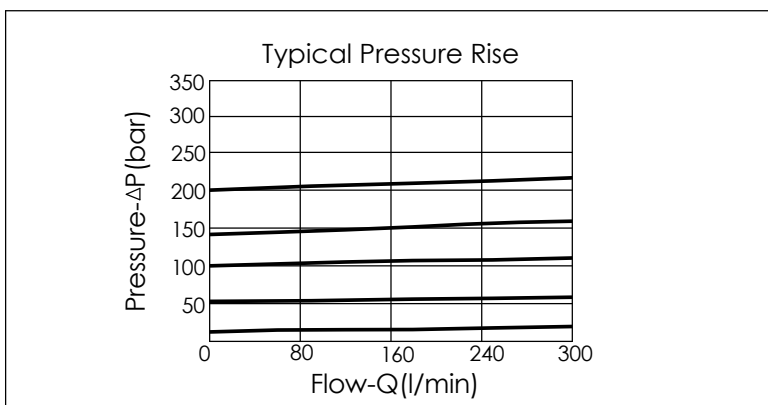

X	OPERATION
30	Standard Type
<ul style="list-style-type: none"> <li>Response Time-Typical (10 ms)</li> <li>Maximum Leakage Approximately (66 cc/min./70 bar)</li> </ul>	

Y	SPRINGS
	MINIMUM CONTROL PRESSURE
D	1.7 bar (25 psi)
W	7 bar (100 psi)
W spring is suit for higher pressure drop application. Please consult our sales department.	
