


### TECHNICAL DATA

Max. Operating pressure:	350	bar
Rated flow:	480	l/min
Cavity-Tooling:	24A-4 (24AB-4)	
Installation torque:	465-500	Nm
Weight:	1.74 (Z=L)	kg

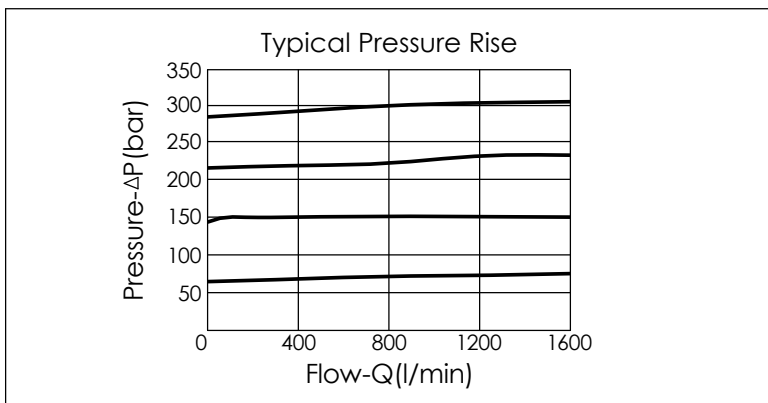

X	OPERATION	
40	Standard Type	
	<ul style="list-style-type: none"> <li>Response Time-Typical (10 ms)</li> <li>Maximum Leakage Approximately (80 cc/min./70 bar)</li> </ul>	

Y	SPRINGS	
	ADJUSTMENT RANGES	
A	7-210 bar	(70 bar Standard Setting)
B	3.5-105 bar	(70 bar Standard Setting)
C	10.5-420 bar	(70 bar Standard Setting)
D	1.7-55 bar	(28 bar Standard Setting)
E	1.7-28 bar	(14 bar Standard Setting)
W	10.5-315 bar	(70 bar Standard Setting)

Z	OPTIONS	
L	Leakproof hex. socket screw.	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	
C	Stainless Steel Tamper Resistant Cover.	