


TECHNICAL DATA	
Max. Operating pressure:	350 bar
Rated flow:	240 l/min
Cavity-Tooling:	23A-4
Installation torque:	200-215 Nm
Weight:	0.63 kg
Will accept maximum pressure at port (2); suitable for use in cross port relief circuits. If used in cross port relief circuits, consider spool leakage.	

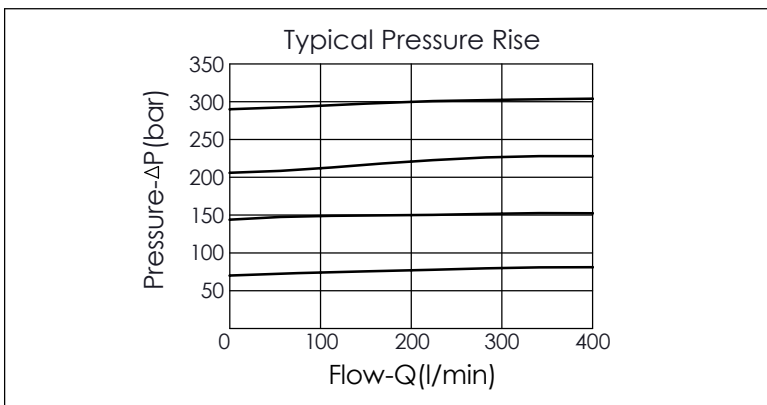

X	OPERATION	
40	Standard Type	
<ul style="list-style-type: none"> Response Time-Typical (10 ms) Maximum Leakage Approximately (65 cc/min./70 bar) 		

Y	SPRINGS	
	MINIMUM CONTROL PRESSURE	
D	1.7 bar (25 psi)	
W	7 bar (100 psi)	
	W spring is suit for higher pressure drop application. Please consult our sales department.	

Z	CAVITIES	
8	8A-2 Cavity	
<ul style="list-style-type: none"> applications: please refer to PRA-8A-2D-Y-Z-74、PRB-8A-2D-Y-Z Any technical questions, please feel free to consult with our sales dept. 		