

TECHNICAL DATA

Max. Operating pressure: 350 bar


Rated flow: 120 l/min

Cavity-Tooling: 5A-2

Installation torque: 60 - 70 Nm

Weight: 0.372 (Z=L) kg

• Approximately 1 drop (0.07 cc) of fluid will pass from the pilot area to the vented spring chamber every 4000 cycles.

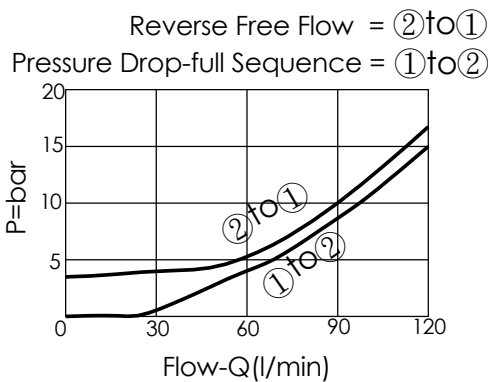

X OPERATION

20 Standard Type

- Response Time-Typical (2 ms)
- Maximum Leakage Approximately (0.7 cc/min.)

Y SPRINGS


ADJUSTMENT RANGES

A	35 - 210 bar (70 bar Standard Setting)
B	20 - 105 bar (70 bar Standard Setting)
C	140 - 420 bar (140 bar Standard Setting)
D	14 - 55 bar (28 bar Standard Setting)
E	7 - 28 bar (14 bar Standard Setting)
W	55 - 315 bar (70 bar Standard Setting)


※ Port ② to Port ① Check Valve Cracking Pressure 2.8 bar

Z OPTIONS

L Leakproof hex. socket screw.



C Stainless Steel Tamper Resistant Cover.



K Handknob with Lock Knob.
(Order Code: 6ZAK001)

