

TECHNICAL DATA

Max. Operating pressure: 350 bar


Rated flow: 60 l/min

Cavity-Tooling: 13A-2

Installation torque: 40 - 50 Nm

Weight: 0.21 (Z=L,LP) kg

· Approximately 1 drop (0.07 cc) of fluid will pass from the pilot area to the vented spring chamber every 4000 cycles.

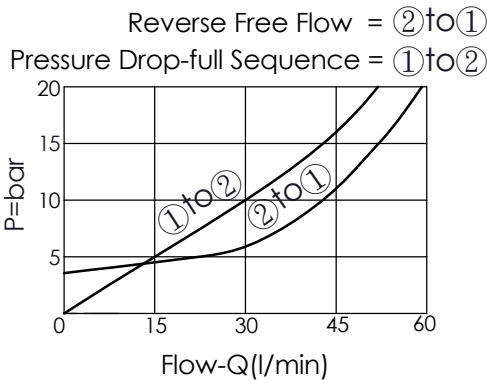

X	OPERATION	
20	Standard Type	
	<ul style="list-style-type: none"> · Response Time-Typical (2 ms) · Maximum Leakage Approximately (15 cc/min./70 bar) 	

Z	OPTIONS	
L	Leakproof hex. socket screw.	
LP	Leakproof hex. socket screw. With stainless steel external metal components	
C	Stainless Steel Tamper Resistant Cover.	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	

Y	SPRINGS	
	ADJUSTMENT RANGES	
A	35 - 210 bar (70 bar Standard Setting)	
B	20 - 105 bar (70 bar Standard Setting)	
C	140 - 420 bar (140 bar Standard Setting)	
D	14 - 55 bar (28 bar Standard Setting)	
E	7 - 28 bar (14 bar Standard Setting)	
W	55 - 315 bar (70 bar Standard Setting)	
* Port ② to Port ① Check Valve Cracking Pressure 0.3 bar		