


TECHNICAL DATA	
Max. pressure:	240 bar (Refer To Performance Chart)
Rated flow:	22 l/min (Refer To Performance Chart)
Cavity-Tooling:	08W-3
Installation torque:	25-35 Nm
Weight:	0.23 (Z=L) kg

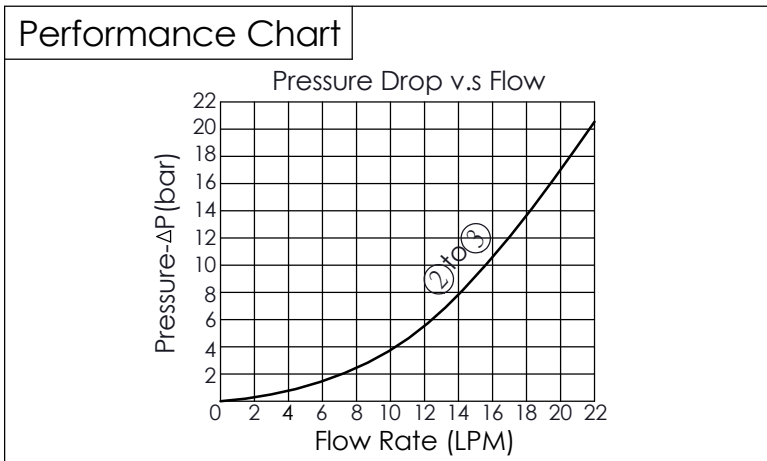

X	OPERATION	
30	Internal Pilot & Drain	

Y	SPRINGS	
	ADJUSTMENT RANGES	
B	10-90 bar	(25 bar Standard Setting)
D	7-42 bar	(25 bar Standard Setting)
E	3-21 bar	(14 bar Standard Setting)
K	20-166 bar	(70 bar Standard Setting)

Z	OPTIONS	
L	Leakproof hex. socket screw.	
T	Three-winged Handknob Kit.	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	