



FLOW CONTROL VALVE (Stainless Steel All Metal Components) (Fixed Orifice, Pressure Compensated)

Ordering Code: **FR-13A-X-Y-Z**

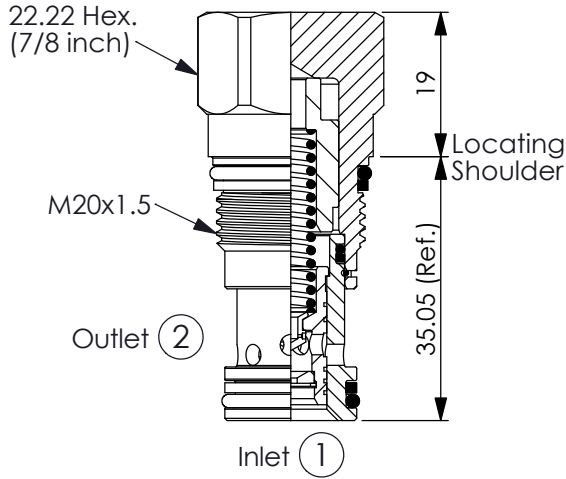


UNIT:mm

Illustrations / detail are for reference only. Data subject to change.



TECHNICAL DATA

Pressure min-max:	10 - 350	bar
Rated flow:	0.4 - 23	l/min
Cavity-Tooling:	13A-2	
Installation torque:	40 - 50	Nm
Weight:	0.11	kg

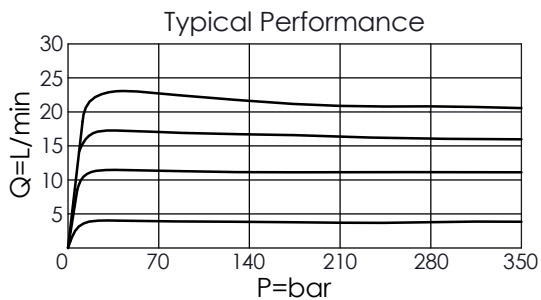

X OPERATION

2F Fixed Setting

· If a momentary impact pressure is needed in the application, please consult our sales department.

Y FLOW SETTING

0040	0.4 LPM
0050	0.5 LPM
0680	6.8 LPM
0750	7.5 LPM
1000	10.0 LPM
1400	14.0 LPM
1500	15.0 LPM

· Factory set flow ratings are within $\pm 10\%$ of the requested setting
 · Customer must specify a flow rating
 · If you need specific flow accuracy, please contact WINNER's sales department

Z OPTIONS

NS Non-adjustable
 With stainless steel
 all metal components 