

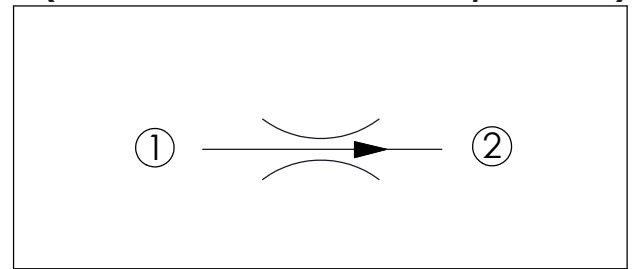


FLOW CONTROL VALVE (Stainless Steel All Metal Components) (Fixed Orifice, Pressure Compensated)

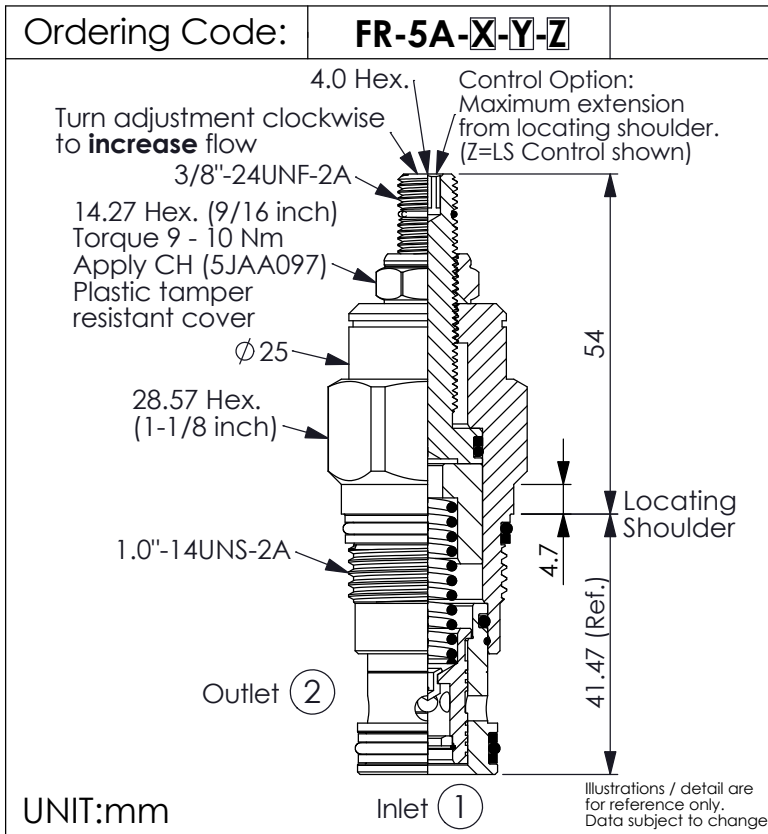

TECHNICAL DATA		
Pressure min-max:	10 - 350	bar
Rated flow:	0.4 - 45	l/min
Cavity-Tooling:	5A-2	
Installation torque:	60 - 70	Nm
Weight:	0.253	kg

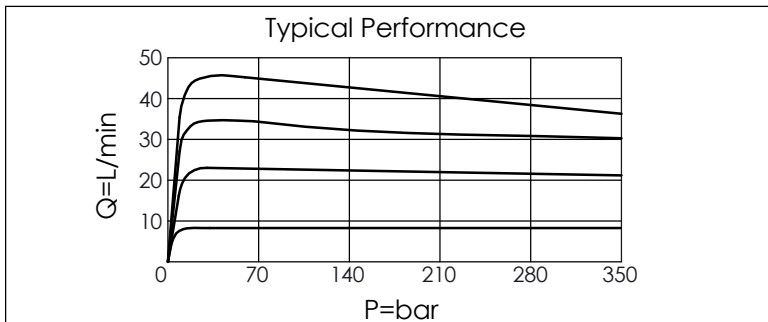

X	OPERATION	
2F	Fixed Setting	

· If a momentary impact pressure is needed in the application, please consult our sales department.

Y	FLOW SETTING	
0040	0.4 LPM	
0800	8.0 LPM	
1300	13.0 LPM	
1700	17.0 LPM	
2000	20.0 LPM	
2500	25.0 LPM	
2550	25.5 LPM	
2900	29.0 LPM	
3000	30.0 LPM	
3600	36.0 LPM	
3750	37.5 LPM	
4000	40.0 LPM	
4100	41.0 LPM	
4500	45.0 LPM	

- Factory set flow ratings are within $\pm 10\%$ of the requested setting
- Customer must specify a flow rating
- If you need specific flow accuracy, please contact WINNER's sales department

Z	OPTIONS	
LS	Leakproof hex. socket screw. With stainless steel all metal components (Adjustment Ranges Approx. $\pm 25\%$)	