


TECHNICAL DATA	
Max. operating pressure:	350 bar
Rated Flow:	36 l/min See Performance Chart
Cavity-Tooling:	08W-2
Installation torque:	25-35 Nm
Weight:	0.12 kg

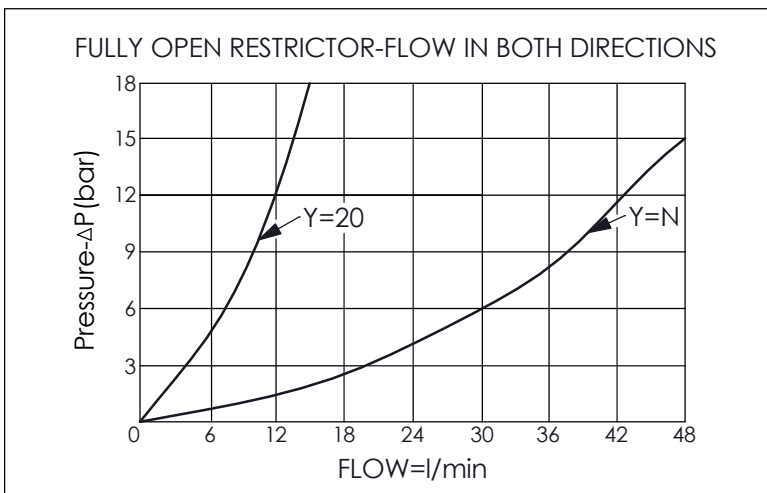

X	OPERATION	
20	Needle Valve	

Y	MAXIMUM NOMINAL ORIFICE	
N	Ø 5.6 mm	
20	Ø 2.0 mm	

Z	OPTIONS	
LS	Leakproof hex. socket screw. With stainless steel all metal components	