


| TECHNICAL DATA           |  |
|--------------------------|--|
| Max. operating pressure: | 350 bar<br>(Refer To Performance Chart)  |
| Rated flow:              | 15 l/min<br>(Refer To Performance Chart) |
| Cavity-Tooling:          | 162A-2                                   |
| Installation torque:     | 27 - 33 Nm                               |
| Weight:                  | 0.067 kg                                 |

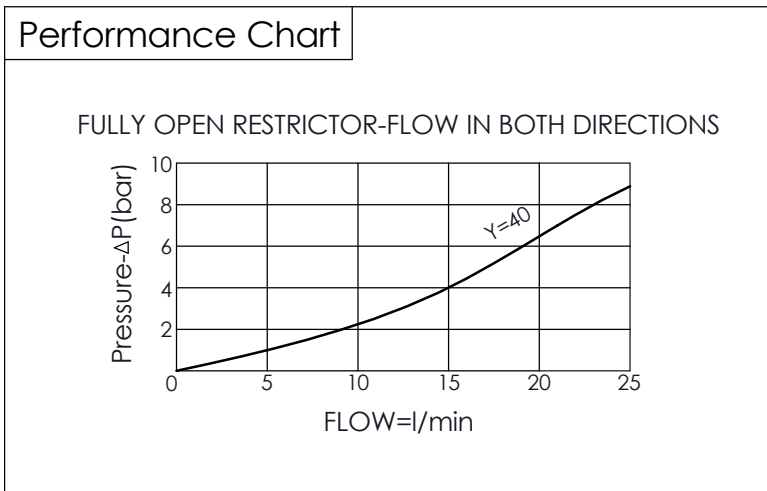

| X  | OPERATION                            |  |
|----|--------------------------------------|--|
| 20 | Needle Valve<br>(Standard Type)      |  |
| 2S | Needle Valve<br>(Short Spindle Type) |  |

| Y  | MAXIMUM NOMINAL ORIFICE DIAMETER |  |
|----|----------------------------------|--|
| 40 | ∅ 4.0 mm                         |  |

| Z  | OPTIONS  |  |
|----|--|--|
| LS | Leakproof hex. socket screw. With stainless steel all metal components |  |