


TECHNICAL DATA	
Max. operating pressure:	350 bar (Refer To Performance Chart)
Rated Flow:	50 l/min (Refer To Performance Chart)
Cavity-Tooling:	5A-2
Installation torque:	60 - 70 Nm
Weight:	0.261 kg

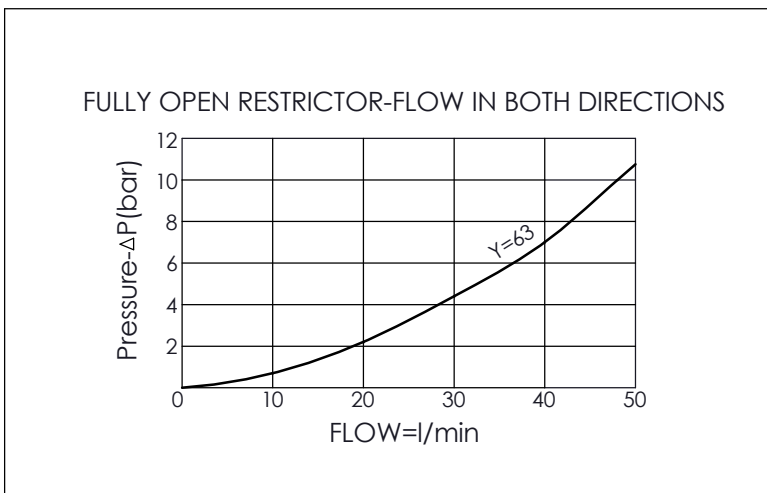

Y	MAXIMUM NOMINAL ORIFICE DIAMETER
63	Ø 6.3 mm
33	Ø 3.3 mm

X	OPERATION
20	Fully Adjustable Needle with Sharp-Edge Orifice

Z	OPTIONS
LS	Leakproof hex. socket screw. With stainless steel all metal components