



FLOW CONTROL VALVE (Stainless Steel All Metal Components) (Fully Adjustable Needle with Sharp-Edge Orifice)


Ordering Code: **NV-18A-X-Y-Z**

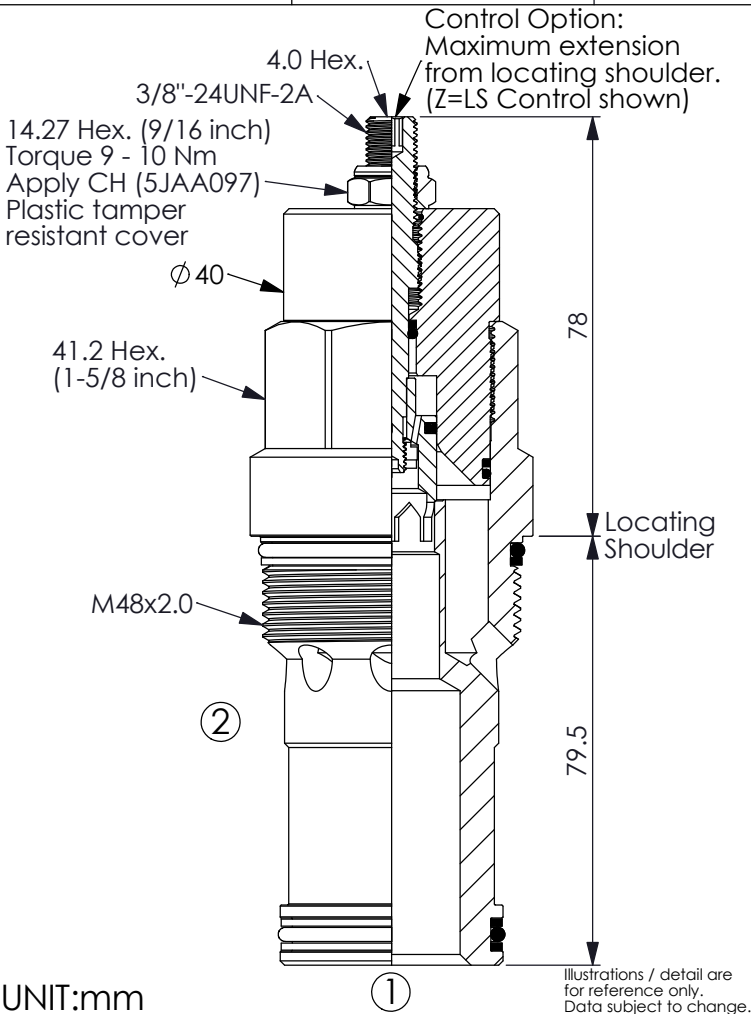

TECHNICAL DATA

Max. pressure:	350	bar
(Refer To Performance Chart)		
Rated Flow:	240	l/min
(Refer To Performance Chart)		
Cavity-Tooling:	18A-2 (18AB-2)	
Installation torque:	465 - 500	Nm
Weight:	1.149	kg

FULLY OPEN RESTRICTOR-FLOW IN BOTH DIRECTIONS

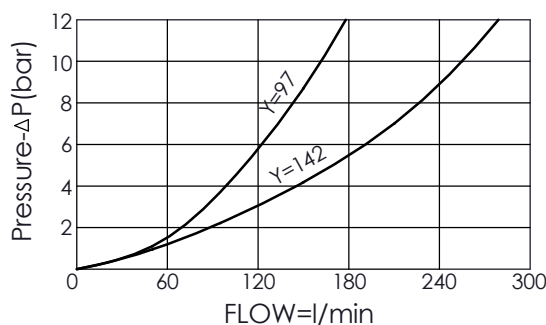

Y MAXIMUM NOMINAL ORIFICE DIAMETER

142	Ø 14.2 mm
97	Ø 9.7 mm

X OPERATION

20 Fully Adjustable Needle with Sharp-Edge Orifice

Z OPTIONS

LS Leakproof hex. socket screw. With stainless steel all metal components

