


TECHNICAL DATA	
Max.Operating pressure:	350 bar
Rated flow:	40 l/min
Cavity-Tooling:	11A-3
Installation torque:	40-50 Nm
Weight:	0.16 kg
Control Pilot Flow (0.11-0.16 L/min.)	

X	OPERATION	
30	Standard Type	

Z	OPTIONS	
LS	Leakproof hex. socket screw. With stainless steel all metal components	

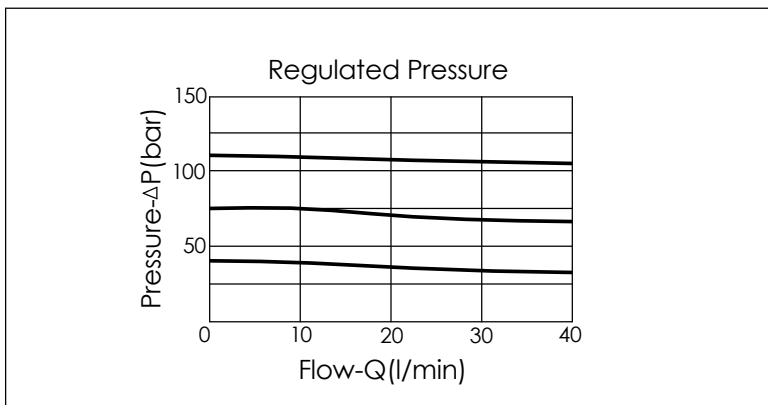

Y	SPRINGS	
	ADJUSTMENT RANGES	
A	7-210 bar (14 bar Standard Setting)	Maximum Differential=210 bar
B	3.5-105 bar (14 bar Standard Setting)	Maximum Differential=210 bar
D	1.7-55 bar (14 bar Standard Setting)	Maximum Differential=140 bar
E	1.7-28 bar (14 bar Standard Setting)	Maximum Differential=140 bar
N	4-55 bar (14 bar Standard Setting)	Maximum Differential=140 bar
Q	4-28 bar (14 bar Standard Setting)	Maximum Differential=140 bar
W	10-315 bar (14 bar Standard Setting)	350 bar inlet pressure