


TECHNICAL DATA		
Max. pressure:	350	bar
Rated flow:	95	l/min
Cavity-Tooling:	10A-2	
Installation torque:	40-50	Nm
Weight:	0.17	kg
Will accept maximum pressure at port ②; suitable for use in cross port relief circuits.		

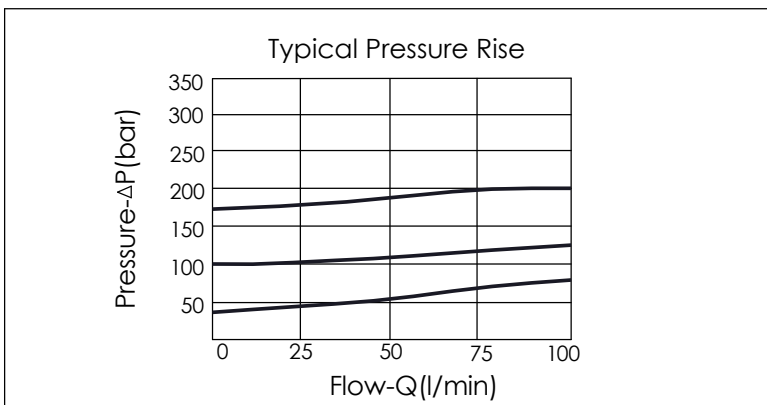

X	OPERATION	
25	Direct Acting	① to ② (P to T)
<ul style="list-style-type: none"> Response Time-Typical (2 ms) Maximum Leakage Approximately (0.7 cc/min.) Dirt tolerant 		

Y	PRESSURE SETTING	
A	35-210 bar	(70 bar Standard Setting)
B	20-105 bar	(70 bar Standard Setting)
C	70-420 bar	(70 bar Standard Setting)
D	14-55 bar	(28 bar Standard Setting)
E	10-28 bar	(14 bar Standard Setting)
S	3.5-14 bar	(7 bar Standard Setting)
W	55-315 bar	(70 bar Standard Setting)

Z	OPTION	
LS	Leakproof hex. socket screw. With stainless steel all metal components	