



SOLENOID OPERATED VALVES Continuous Duty Coils-ED 100%

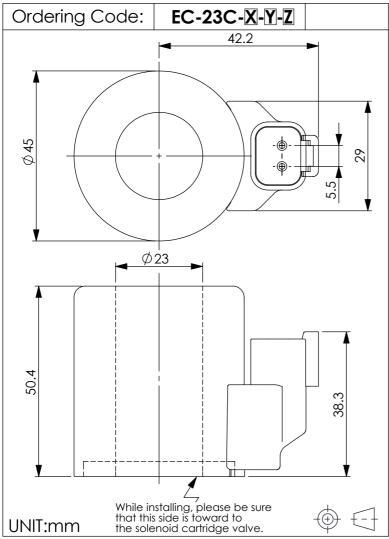



## **TECHNICAL DATA**

Weight: 0.35 kg

HEAT INSULATION CLASS H: 356°F (180°C)

Ambient temperature range:

-22+140°F

(-30+60°€)

Available on request: Different Voltages -Different connectors.

Inlet voltage fluctuations must not exceed ± 10% of nominal voltage to obtain correct operation and long life of coils.

Connector Environment Rating: IP69K

	X	Nominal Power (W) (At rated voltage)	
	300	30 Watt.	
:	e nominal power (W) at maximum		

\*The nominal power (W) at maximum current with proportional control is 17 watt.

Y	Connections				
F	DEUTSCH DT04-2P (V)				

Z	Voltage (V) Nominal	Resistance (Ω) 20~25°C	Maximum Current (A) (Proportional Control)	
Е	12V DC	2.5±7%	2600 mA	
D	24V DC	19.2±7%	940 mA	

Rev.220331 H.101,322.E