



## **SOLENOID OPERATED VALVE**

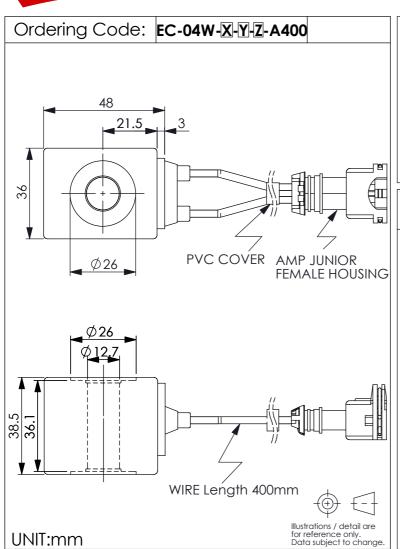



## **TECHNICAL DATA**

Weight: 0.22 kg

HEAT INSULATION CLASS H: 356°F (180

356°F (180°C)

Ambient temperature range:

-22+140°F

(-30+60°€)

Available on request: Different Voltages -Different connectors.

Inlet voltage fluctuations must not exceed ± 10% of nominal voltage to obtain correct operation and long life of coils.

CE approved, UKCA approved

X	Power (W)		Υ		Connections		
200	20 Watt.		С		DOUBLE LEAD (L)		

Z	Voltage (V)	Resistance ( $\Omega$ )	Curre		
	Nominal	20~25 °C	Cold Coil	Hot Coil	
Е	12V DC	7.5±7%	1.66	1.06	
D	24V DC	28.6±7%	0.88	0.53	

Rev.221110 H.101.700.E