


Ordering Code: **MH03CAW-X-Y-Z 01**

Stack Height : 44.5mm

O-RING CODE NO. 4KAA012AA001

G PORT

UNIT:mm

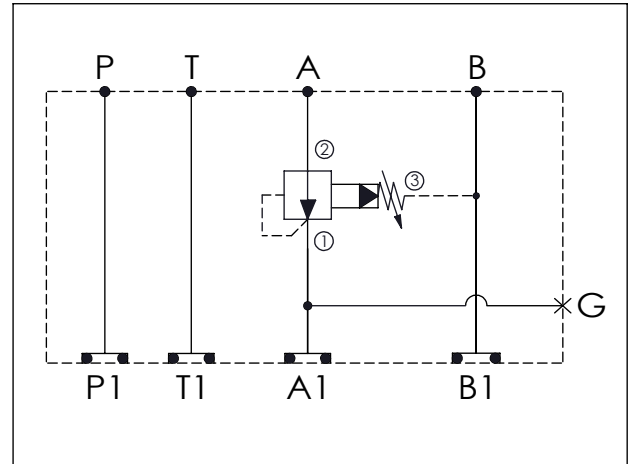

TECHNICAL DATA


Aluminum Body Pressure Rating: 210 bar
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:
 Refer to PB11A-X-Y-Z
 * Refer to Winner Cartridge Valve Catalog.

Aluminum	0.4 kg(WITHOUT VALVE)
	0.6 kg(INCLUDE VALVE)
Ductile Iron	1.1 kg(WITHOUT VALVE)
	1.3 kg(INCLUDE VALVE)

* If you need the special specification. Please contact us.

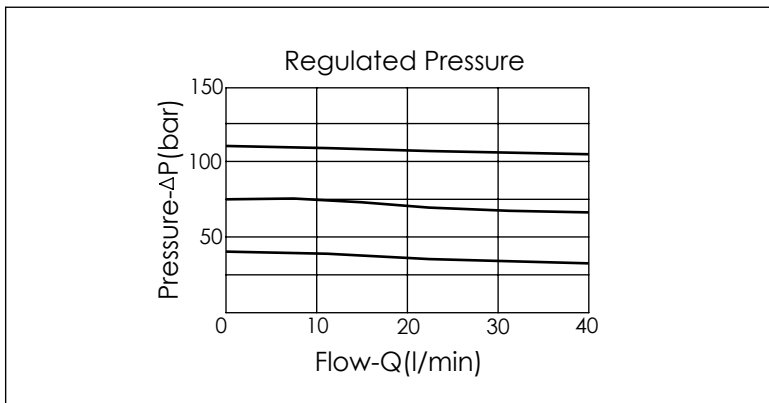

X	SELECTION FOR A PORT CONTROL
11A3	CAVITY ONLY(WITHOUT VALVE)
PB0A	PB11A30AL (40LPM ,7-210bar)

Please refer to the list price of cartridge program.

Y	SELECTION FOR G PORT
G02	G 1/4"(Metric)
N02	NPT 1/4"(U.S. Units)

Z	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM
S	DUCTILE IRON(Phosphatizing)
E	DUCTILE IRON(Zinc-Nickel plating)