



## ISO 03 SANDWICH MANIFOLD

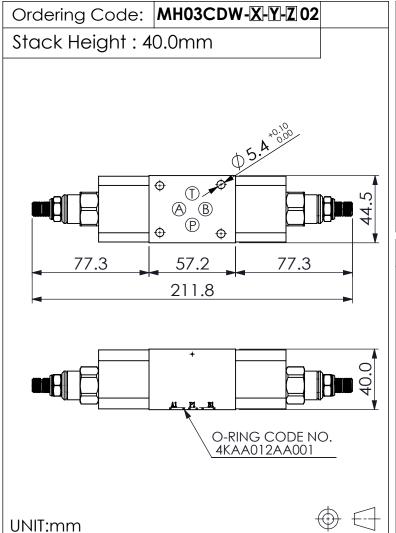



## **TECHNICAL DATA**

Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar

Rated flow: 40 I/min


## Cartridge Valve:

Refer to PB11A-X-Y-Z

\* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.45 0.8	kg(WITHOUT VALVES) kg(INCLUDE VALVES)
Ductile Iron	1.3 1.65	kg(WITHOUT VALVES) kg(INCLUDE VALVES)

\* If you need the special specification. Please contact us.



X	SELECTION FOR A PORT CONTROL	
11A3	CAVITY ONLY (WITHOUT VALVE)	
PBOA	PB11A30AL (40LPM ,7-210bar)	
Please refer to the list price of cartridge program.		

Y	SELECTION FOR B PORT CONTROL	
11A3	CAVITY ONLY (WITHOUT VALVE)	
PB0A	PB11A30AL (40LPM , 7-210bar)	
Please refer to the list price of cartridge program.		

Z	BODY MATERIAL		
Α	HIGH-STRENGTH ALUMINUM		
S	DUCTILE IRON(Phosphatizing)		
E	DUCTILE IRON(Zinc-Nickel plating)		

Rev.250108 M.CDW.343