



ISO 03 SANDWICH MANIFOLD

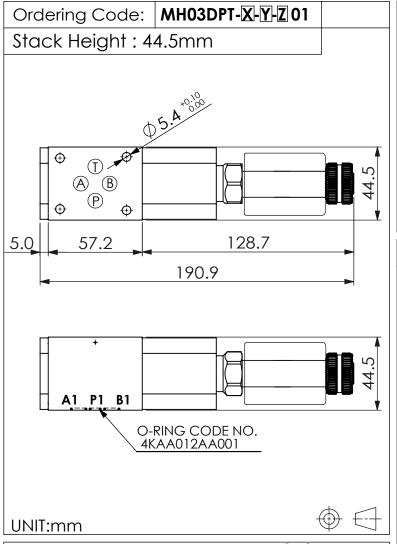

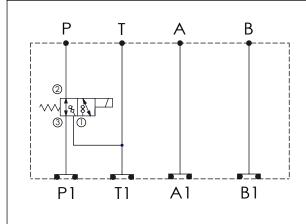

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar

Rated flow: 30 1/min

Cartridge Valve:

Refer to EP11A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.46 kg(WITHOUT VALVE) 0.7 kg(INCLUDE VALVE ,WITHOUT COIL)
Ductile Iron	1.33 kg(WITHOUT VALVE) 1.57 kg(INCLUDE VALVE ,WITHOUT COIL)

* If you need the special specification. Please contact us.

(0)	
VP (bar) 40- 00- 00- 00- 00- 00- 00- 00- 00- 00-	
Pressure-△P(bar)	
0	10 20 30 40 Flow-Q(I/min)

x	SELECTION FOR A PORT CONTROL
N	WITHOUT PORT

Y	SELECTION FOR B PORT CONTROL (REFER TO EP11A-X-Y-Z)	
11A3	CAVITY ONLY (WITHOUT VALVE)	
	EP11A3C54N04,30LPM,350bar(WITHOUT COIL)	
EP54M04	54M04 EP11A3C54M04 , 30LPM,350bar (WITH SCREW-OUT KNOB STYLE , WITHOUT COIL)	
COIL	. MUST BE ORDERED SEPARATELY (REFER TO EC-16B-X-Y-Z)	

Z	BODY MATERIAL	
Α	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	

If there are requirements for other materials or surface treatments, please contact the Winner sales department.

Rev.240923 M.DPT.302