


## ISO 03 SANDWICH MANIFOLD

Ordering Code: **MH03EBW-X-Y-Z02**

Stack Height : 40.0mm

UNIT:mm

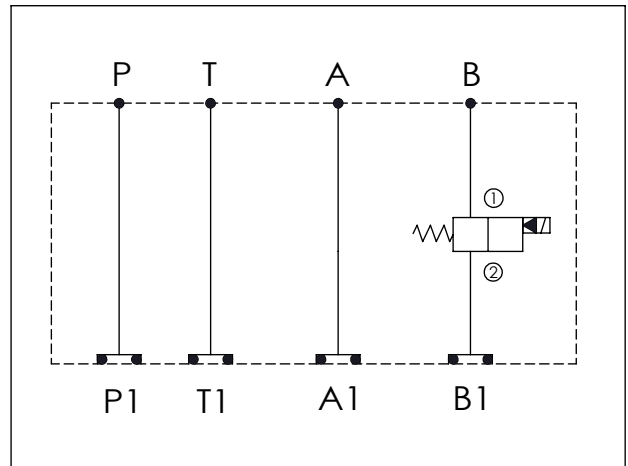

### TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar  
 Ductile Iron Body Pressure Rating: 350 bar


Rated flow: 40 l/min

Cartridge Valve:  
 Refer to EP08W-X-Y-Z

\* Refer to Winner Cartridge Valve Catalog.

Aluminum	0.27 kg(WITHOUT VALVES) 0.4 kg(INCLUDE VALVES ,WITHOUT COIL)
----------	---

\* If you need the special specification. Please contact us.

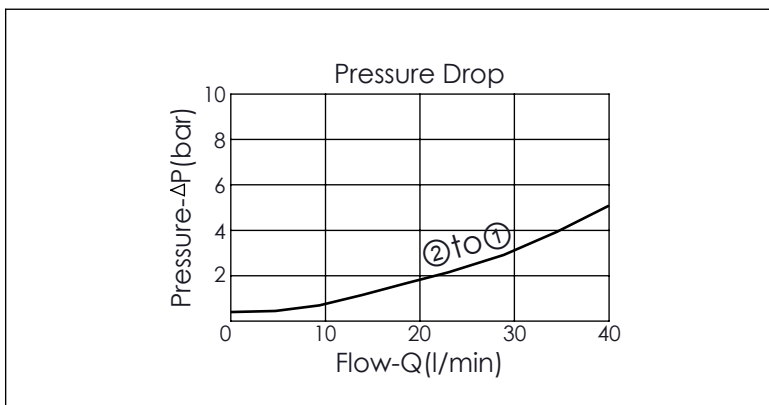

Y	SELECTION FOR B PORT CONTROL (REFER TO EP08W-X-Y-Z)
<b>08W2</b>	CAVITY ONLY(WITHOUT VALVE)
<b>EP01</b>	EP08W2A01N05 , 40LPM,350bar(NORMALLY CLOSED,WITHOUT COIL)
<b>EP02</b>	EP08W2A02N05 , 40LPM,350bar(NORMALLY OPEN,WITHOUT COIL)
<b>EP01M</b>	EP08W2A01M05 , 40LPM,350bar(NORMALLY CLOSED WITH KNOB STYLE MANUAL OVERRIDE,WITHOUT COIL)
<b>EP02P</b>	EP08W2A02P05 , 40LPM,350bar(NORMALLY OPEN WITH PUSH STYLE MANUAL OVERRIDE,WITHOUT COIL)
COIL MUST BE ORDERED SEPARATELY (REFER TO EC-04W-X-Y-Z)	

<b>X</b>	SELECTION FOR A PORT CONTROL
<b>N</b>	WITHOUT PORT

Z	BODY MATERIAL
<b>A</b>	HIGH-STRENGTH ALUMINUM