

### TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar  
 Ductile Iron  
 Body Pressure Rating: 350 bar


Rated flow: 40 l/min

Cartridge Valve:  
 Refer to EP08W-X-Y-Z  
 EP08W-X-Y-Z

\* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.29 kg (WITHOUT VALVES) 0.56 kg (INCLUDE VALVES , WITHOUT COIL)
----------	------------------------------------------------------------------------

\* If you need the special specification.  
 Please contact us.

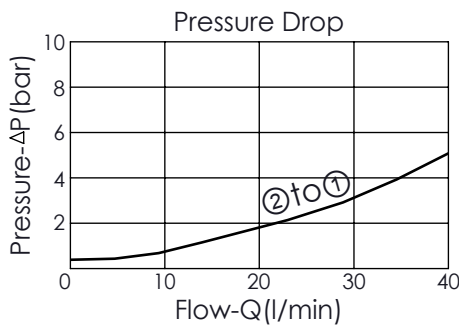

X	SELECTION FOR A PORT CONTROL (REFER TO EP08W-X-Y-Z)
08W2	CAVITY ONLY (WITHOUT VALVE)
EP01	EP08W2A01N05 , 40LPM, 350bar (NORMALLY CLOSED, WITHOUT COIL)
EP02	EP08W2A02N05 , 40LPM, 350bar (NORMALLY OPEN, WITHOUT COIL)
EP01M	EP08W2A01M05 , 40LPM, 350bar (NORMALLY CLOSED WITH KNOB STYLE MANUAL OVERRIDE, WITHOUT COIL)
EP02P	EP08W2A02P05 , 40LPM, 350bar (NORMALLY OPEN WITH PUSH STYLE MANUAL OVERRIDE, WITHOUT COIL)

COIL MUST BE ORDERED SEPARATELY  
(REFER TO EC-04W-X-Y-Z)

Y	SELECTION FOR B PORT CONTROL (REFER TO EP08W-X-Y-Z)
08W2	CAVITY ONLY (WITHOUT VALVE)
EP01	EP08W2A01N05 , 40LPM, 350bar (NORMALLY CLOSED, WITHOUT COIL)
EP02	EP08W2A02N05 , 40LPM, 350bar (NORMALLY OPEN, WITHOUT COIL)
EP01M	EP08W2A01M05 , 40LPM, 350bar (NORMALLY CLOSED WITH KNOB STYLE MANUAL OVERRIDE, WITHOUT COIL)
EP02P	EP08W2A02P05 , 40LPM, 350bar (NORMALLY OPEN WITH PUSH STYLE MANUAL OVERRIDE, WITHOUT COIL)

COIL MUST BE ORDERED SEPARATELY  
(REFER TO EC-04W-X-Y-Z)

Z	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM