

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar
 Ductile Iron Body Pressure Rating: 350 bar


Rated flow: 40 l/min

Cartridge Valve:
 Refer to EP08W-X-Y-Z
 EP08W-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

| | |
|--------------|--|
| Aluminum | 0.35 kg (WITHOUT VALVES) 0.61 kg (INCLUDE VALVES, WITHOUT COIL) |
| Ductile Iron | 0.95 kg (WITHOUT VALVES) 1.21 kg (INCLUDE VALVES, WITHOUT COIL) |

* If you need the special specification. Please contact us.

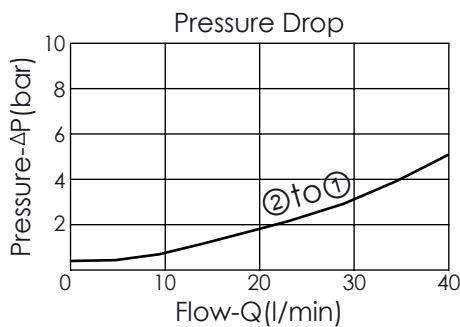

| Y | SELECTION FOR B PORT CONTROL (REFER TO EP08W-X-Y-Z) |
|--------------|---|
| 08W2 | CAVITY ONLY (WITHOUT VALVE) |
| EP01 | EP08W2A01N05, 40LPM, 350bar (NORMALLY CLOSED, WITHOUT COIL) |
| EP02 | EP08W2A02N05, 40LPM, 350bar (NORMALLY OPEN, WITHOUT COIL) |
| EP01M | EP08W2A01M05, 40LPM, 350bar (NORMALLY CLOSED WITH KNOB STYLE MANUAL OVERRIDE, WITHOUT COIL) |
| EP02P | EP08W2A02P05, 40LPM, 350bar (NORMALLY OPEN WITH PUSH STYLE MANUAL OVERRIDE, WITHOUT COIL) |

COIL MUST BE ORDERED SEPARATELY (REFER TO EC-04W-X-Y-Z)

| X | SELECTION FOR A PORT CONTROL (REFER TO EP08W-X-Y-Z) |
|--------------|---|
| 08W2 | CAVITY ONLY (WITHOUT VALVE) |
| EP01 | EP08W2A01N05, 40LPM, 350bar (NORMALLY CLOSED, WITHOUT COIL) |
| EP02 | EP08W2A02N05, 40LPM, 350bar (NORMALLY OPEN, WITHOUT COIL) |
| EP01M | EP08W2A01M05, 40LPM, 350bar (NORMALLY CLOSED WITH KNOB STYLE MANUAL OVERRIDE, WITHOUT COIL) |
| EP02P | EP08W2A02P05, 40LPM, 350bar (NORMALLY OPEN WITH PUSH STYLE MANUAL OVERRIDE, WITHOUT COIL) |

COIL MUST BE ORDERED SEPARATELY (REFER TO EC-04W-X-Y-Z)

| Z | BODY MATERIAL |
|----------|------------------------|
| A | HIGH-STRENGTH ALUMINUM |
| S | DUCTILE IRON |