


Ordering Code:	<b>MH03EPP-X-Y-Z 03</b>
Stack Height : 63.0mm	


O-RING CODE NO.  
4KAA012AA001

UNIT:mm

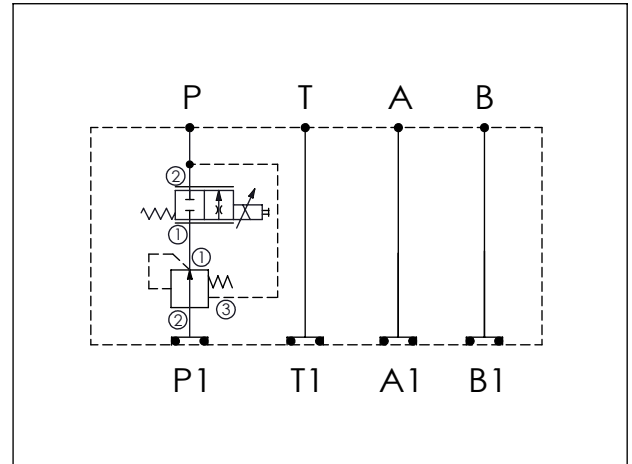

<b>TECHNICAL DATA</b>	
Aluminum Body Pressure Rating:	210 bar
Ductile Iron Body Pressure Rating:	350 bar
Rated flow:	40 l/min
Cartridge Valve:	Refer to LP11A-X-Y-Z PFC17E-X-Y-Z
* Refer to Winner Cartridge Valves Catalog.	
Aluminum	0.63 kg(WITHOUT VALVES) 1.2 kg(INCLUDE VALVES ,WITHOUT COIL)

\* If you need the special specification. Please contact us.

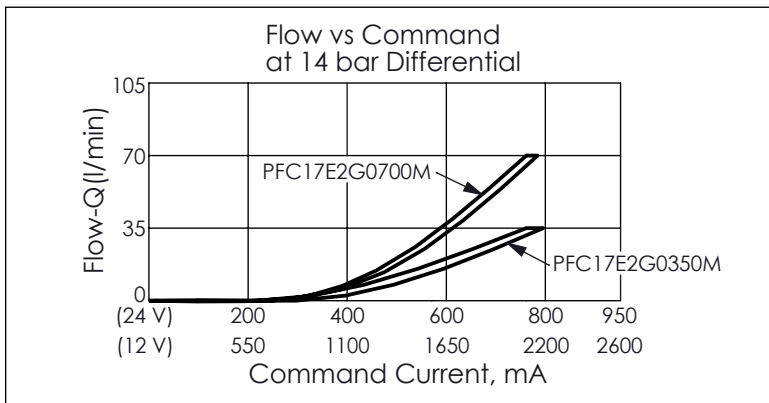

<b>Y</b>	<b>SELECTION FOR FLOW CONTROL VALVE (REFER TO PFC17E-X-Y-Z)</b>
<b>17E2</b>	CAVITY ONLY(WITHOUT VALVE)
<b>PFC35</b>	PFC17E2G0350M(35LPM)
<b>PFC70</b>	PFC17E2G0700M(70LPM)
COIL MUST BE ORDERED SEPARATELY (REFER TO EC-23C-X-Y-Z)	

<b>X</b>	<b>SELECTION FOR COMPENSATOR</b>
<b>11A3</b>	CAVITY ONLY(WITHOUT VALVE)
<b>LP140</b>	LP11A30140N(60LPM,14.0bar)
Please refer to the list price of cartridge program.	

<b>Z</b>	<b>BODY MATERIAL</b>
<b>A</b>	HIGH-STRENGTH ALUMINUM