

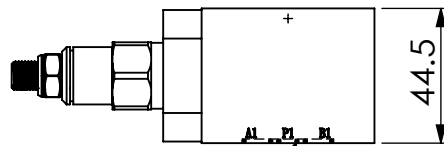


Ordering Code: **MH03FAO-X-Y-Z01**
 Stack Height : 44.5mm

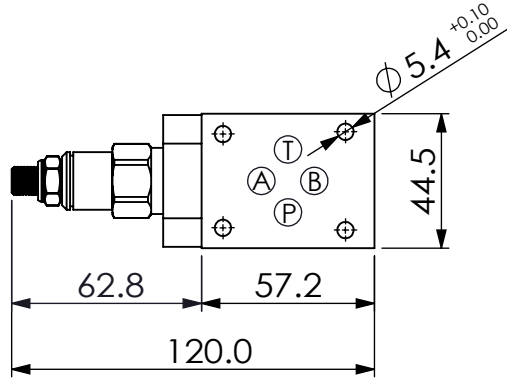

O-RING CODE NO.
4KAA012AA001

UNIT:mm

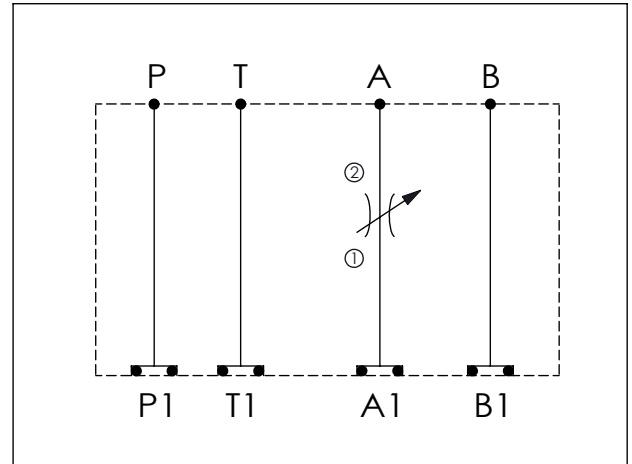

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:


Refer to NV13A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.35 kg(WITHOUT VALVE) 0.5 kg(INCLUDE VALVE)
Ductile Iron	1.0 kg(WITHOUT VALVE) 1.15 kg(INCLUDE VALVE)

* If you need the special specification.
Please contact us.

FULLY OPEN RESTRICTOR-FLOW IN BOTH DIRECTIONS

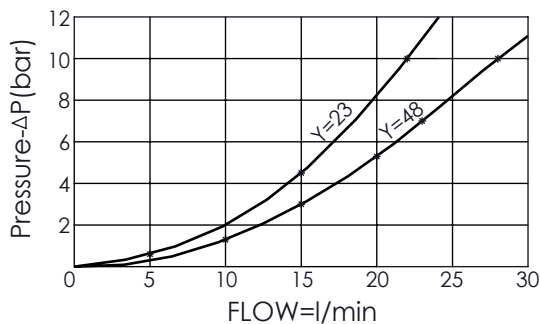

X SELECTION FOR A PORT CONTROL

13A2	CAVITY ONLY(WITHOUT VALVE)
NV48	NV13A2048L (350bar)

Please refer to the list price of cartridge program.

Y SELECTION FOR B PORT CONTROL

N WITHOUT PORT

Z BODY MATERIAL

A HIGH-STRENGTH ALUMINUM

S DUCTILE IRON