


Ordering Code: **MH03FBO-X-Y-Z01**

Stack Height : 44.5mm

UNIT:mm

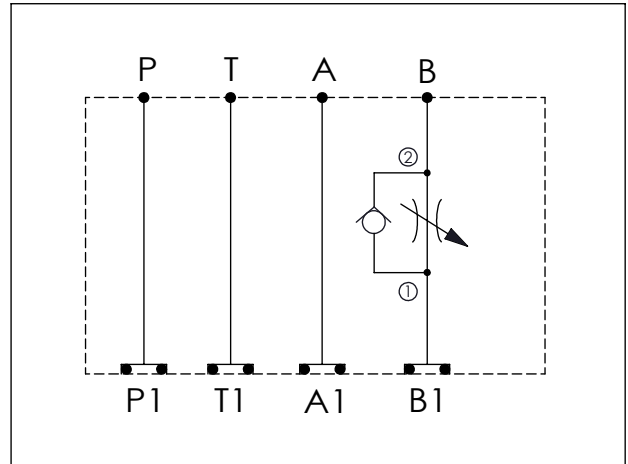

TECHNICAL DATA


Aluminum Body Pressure Rating: 210 bar
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:
 Refer to NC13A-X-Y-Z
 * Refer to Winner Cartridge Valves Catalog.

Aluminum	0.35 kg(WITHOUT VALVE) 0.5 kg(INCLUDE VALVE)
Ductile Iron	1.0 kg(WITHOUT VALVE) 1.15 kg(INCLUDE VALVE)

* If you need the special specification. Please contact us.

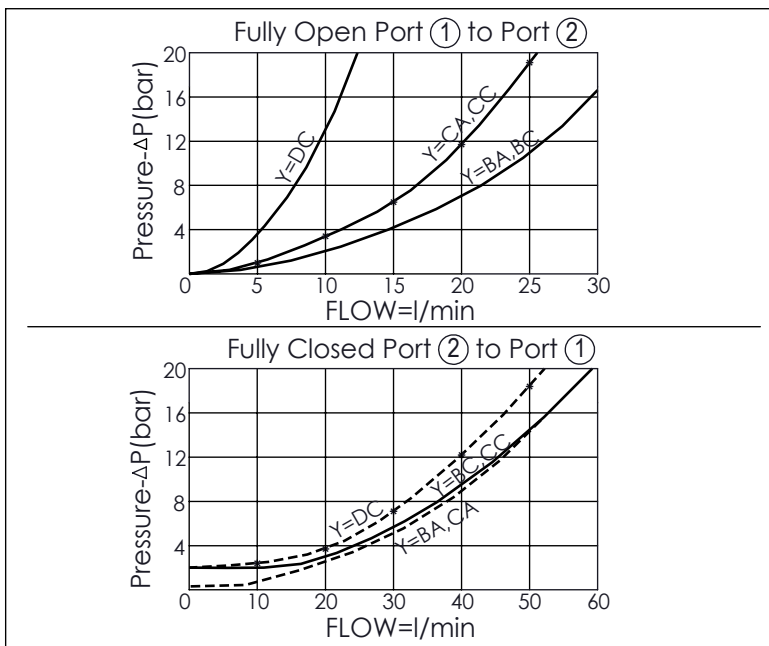

X	SELECTION FOR A PORT CONTROL
N	WITHOUT PORT

Z	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM
S	DUCTILE IRON

Y	SELECTION FOR B PORT CONTROL
13A2	CAVITY ONLY(WITHOUT VALVE)
NCBA	NC13A21BAL(20LPM,0.3bar)
NCBC	NC13A21BCL(20LPM,2.0bar)