

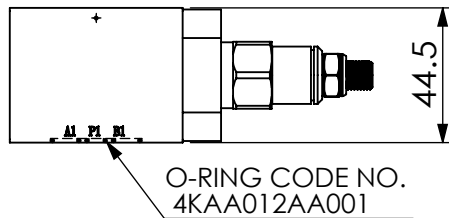


Ordering Code: **MH03FBO-X-Y-Z01**
 Stack Height : 44.5mm

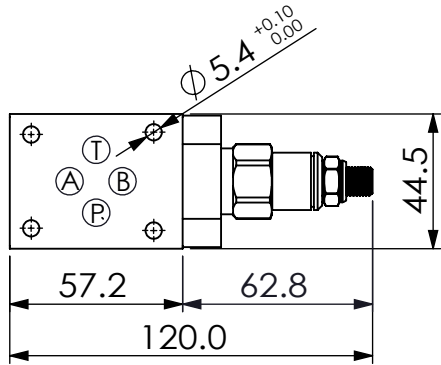

UNIT:mm

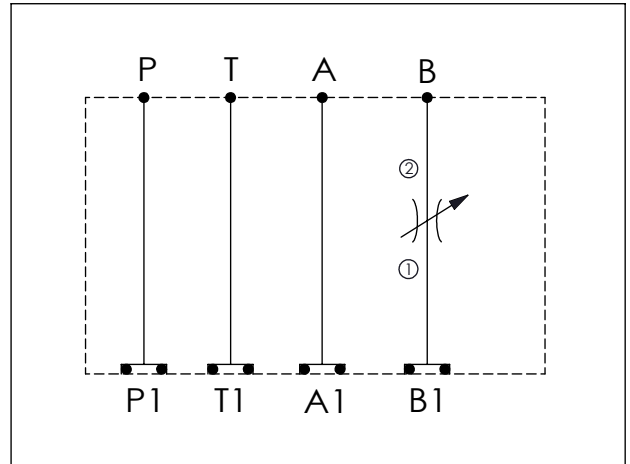

TECHNICAL DATA


Aluminum Body Pressure Rating: 210 bar
 Ductile Iron Body Pressure Rating: 350 bar
 Rated flow: 40 l/min

Cartridge Valve:
 Refer to NV13A-X-Y-Z
 * Refer to Winner Cartridge Valves Catalog.

Aluminum	0.35 kg(WITHOUT VALVE) 0.5 kg(INCLUDE VALVE)
Ductile Iron	1.0 kg(WITHOUT VALVE) 1.15 kg(INCLUDE VALVE)

* If you need the special specification. Please contact us.

FULLY OPEN RESTRICTOR-FLOW IN BOTH DIRECTIONS

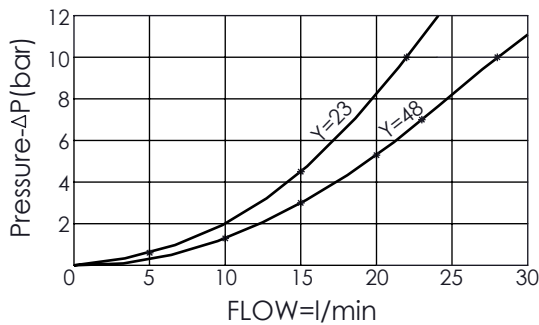

X SELECTION FOR A PORT CONTROL

N WITHOUT PORT

Y SELECTION FOR B PORT CONTROL

13A2 CAVITY ONLY(WITHOUT VALVE)

NV48 NV13A2048L (350bar)

Z BODY MATERIAL

A HIGH-STRENGTH ALUMINUM

S DUCTILE IRON

Please refer to the list price of cartridge program.