


ISO 03 SANDWICH MANIFOLD

Ordering Code: **MH03FDB-X-Y-Z01**



Stack Height : 44.5mm

O-RING CODE NO. 4KAA012AA001

UNIT:mm

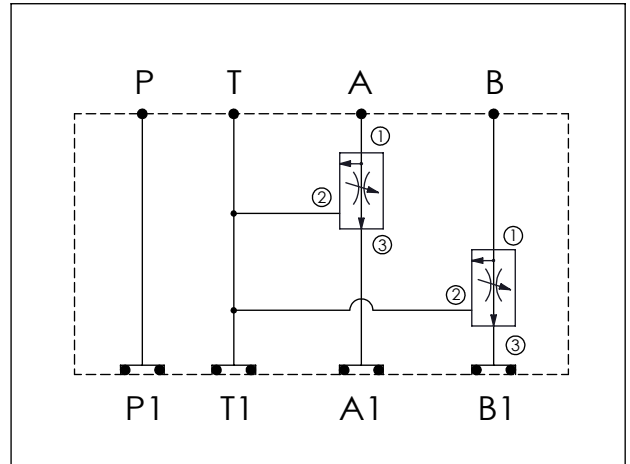

TECHNICAL DATA	
Aluminum Body Pressure Rating:	210 bar
Ductile Iron Body Pressure Rating:	350 bar
Rated flow:	40 l/min
Cartridge Valve:	Refer to FR10W-X-Y-Z
	* Refer to Winner Cartridge Valves Catalog.
Aluminum	0.47 kg(WITHOUT VALVES) 0.75 kg(INCLUDE VALVES)
Ductile Iron	1.36 kg(WITHOUT VALVES) 1.64 kg(INCLUDE VALVES)
* If you need the special specification. Please contact us.	

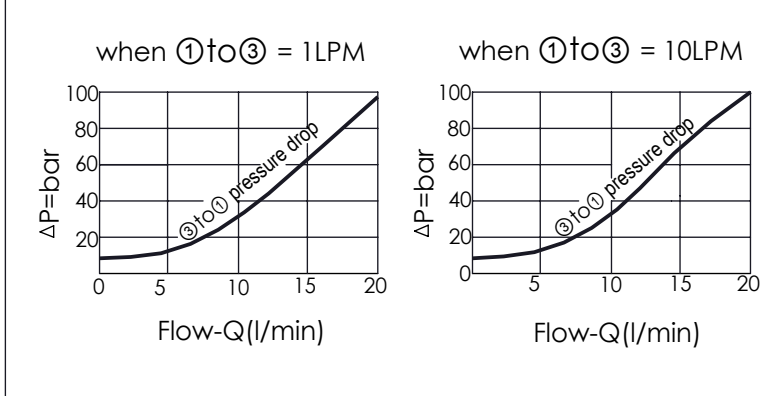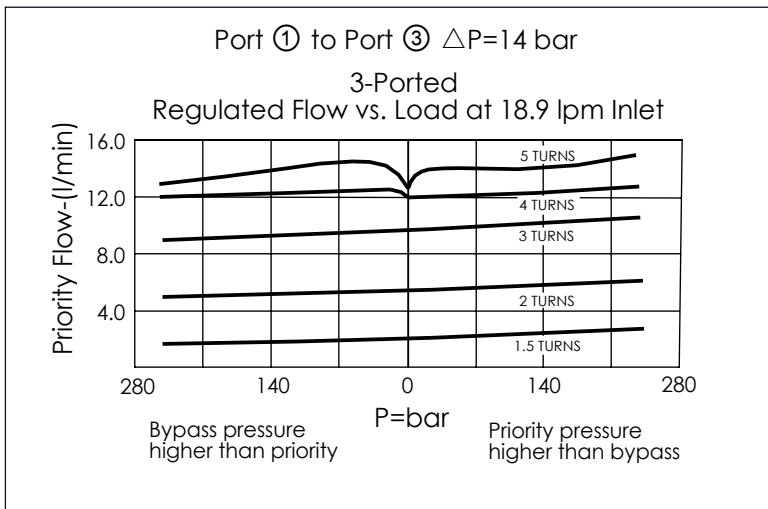

X	SELECTION FOR A PORT CONTROL
10W3	CAVITY ONLY(WITHOUT VALVE)
FR1L	FR10W31NL(13LPM,240bar)
FR3L	FR10W33NL(38LPM,240bar)
Y	SELECTION FOR B PORT CONTROL
10W3	CAVITY ONLY(WITHOUT VALVE)
FR1L	FR10W31NL(13LPM,240bar)
FR3L	FR10W33NL(38LPM,240bar)
Z	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM
S	DUCTILE IRON