



ISO 03 SANDWICH MANIFOLD

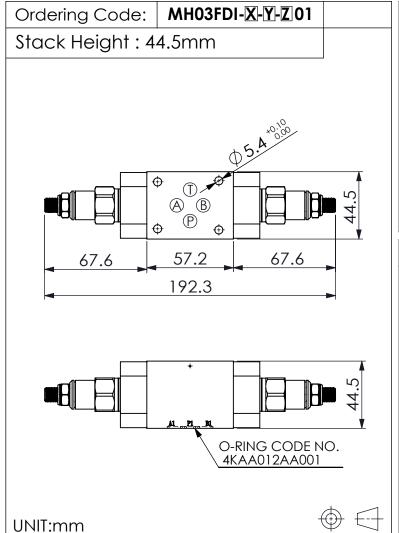

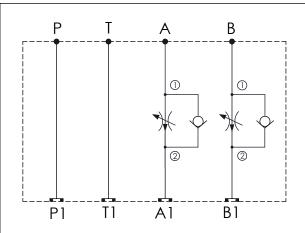

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar

Rated flow: 23 1/min

(Pressure Compensated)


Cartridge Valve:

Refer to FR13A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.4 kg(WITHOUT VALVES) 0.7 kg(INCLUDE VALVES)
Ductile Iron	1.15 kg(WITHOUT VALVES) 1.45 kg(INCLUDE VALVES)

^{*} If you need the special specification. Please contact us.

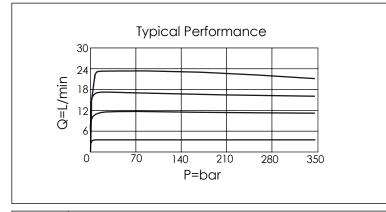

X	X SELECTION FOR A PORT CONTRO		
13A2	CAVITY ONLY (WITHOUT VALVE)		
FROA	FR13A20AL(0.4-23LPM,350bar)		
FR0C	FR13A20CL(0.4-4LPM,350bar)		
Please	Please refer to the list price of cartridge program.		

Y	SELECTION FOR B PORT CONTROL	
13A2	CAVITY ONLY (WITHOUT VALVE)	
FROA	FR13A20AL(0.4-23LPM,350bar)	
FROC	FR13A20CL(0.4-4LPM,350bar)	
Please	Please refer to the list price of cartridge program	

Z	BODY MATERIAL	
Α	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	

Rev.220311 M.FDI.302