



UNIT:mm

ISO 03 SANDWICH MANIFOLD

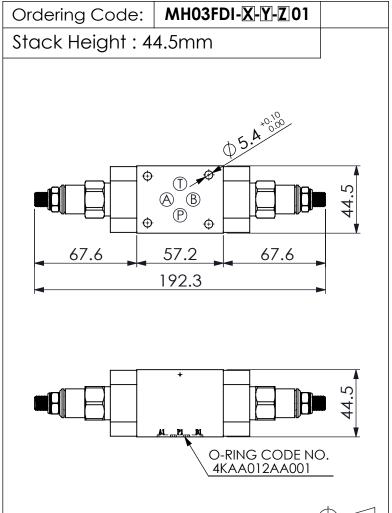



TECHNICAL DATA Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar


Rated flow: 40 I/min

Cartridge Valve: Refer to NV13A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.4 kg(WITHOUT VALVES) 0.7 kg(INCLUDE VALVES)		
Ductile Iron	1.15 kg(WITHOUT VALVES) 1.45 kg(INCLUDE VALVES)		

^{*} If you need the special specification. Please contact us.

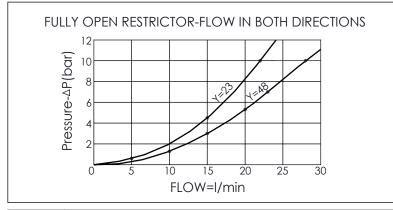

X	SELECTION FOR A PORT CONTROL	
13A2	CAVITY ONLY (WITHOUT VALVE)	
NV48	NV13A2048L (350bar)	
Please	e refer to the list price of cartridge program.	

Y	SELECTION FOR B PORT CONTROL	
13A2	CAVITY ONLY (WITHOUT VALVE)	
NV48	NV13A2048L (350bar)	
Please	lease refer to the list price of cartridge program.	

Z	BODY MATERIAL	
Α	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	

Rev.220311 M.FDI.303