



Ordering Code: MH03FDO-X-Y-Z01	
Stack Height : 44.5mm	

UNIT:mm

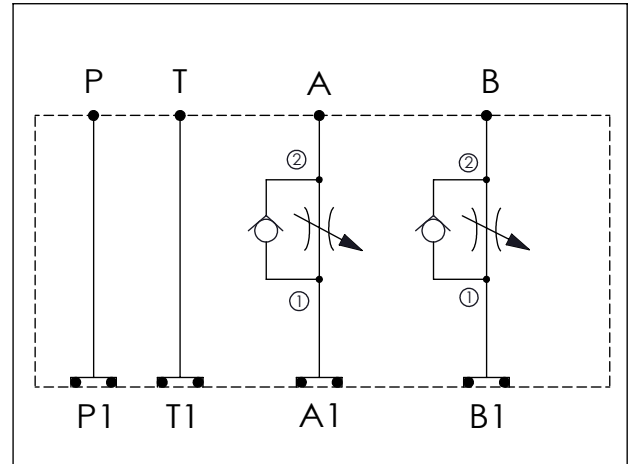

TECHNICAL DATA	
Aluminum Body Pressure Rating:	210 bar
Ductile Iron Body Pressure Rating:	350 bar
Rated flow:	40 l/min
Cartridge Valve: Refer to NC13A-X-Y-Z	
* Refer to Winner Cartridge Valves Catalog.	
Aluminum	0.4 kg(WITHOUT VALVES) 0.7 kg(INCLUDE VALVES)
Ductile Iron	1.15 kg(WITHOUT VALVES) 1.45 kg(INCLUDE VALVES)
* If you need the special specification. Please contact us.	

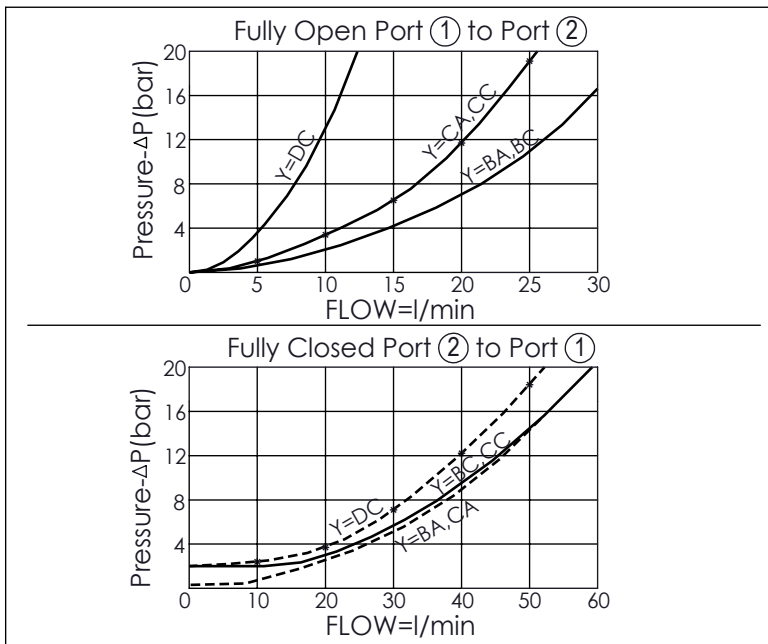

X	SELECTION FOR A PORT CONTROL
13A2	CAVITY ONLY(WITHOUT VALVE)
NCBA	NC13A21BAL (20LPM,0.3bar)
NCBC	NC13A21BCL (20LPM,2.0bar)
Please refer to the list price of cartridge program.	

Y	SELECTION FOR B PORT CONTROL
13A2	CAVITY ONLY(WITHOUT VALVE)
NCBA	NC13A21BAL(20LPM,0.3bar)
NCBC	NC13A21BCL(20LPM,2.0bar)

Z	BODY MATERIAL	
A	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	