


Ordering Code: **MH03FDO-X-Y-Z01**

Stack Height : 44.5mm

O-RING CODE NO.
4KAA012AA001

UNIT:mm

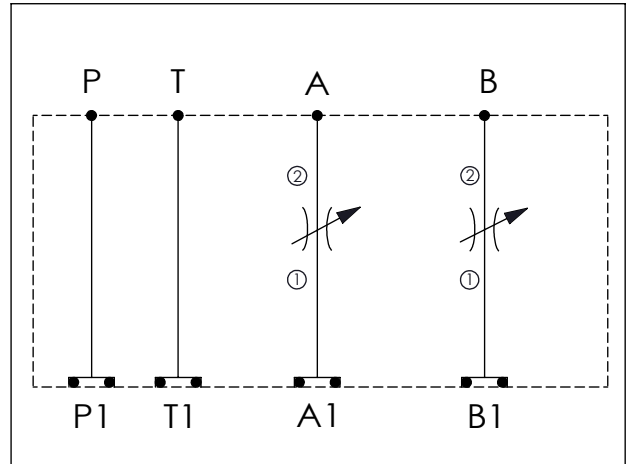

TECHNICAL DATA


Aluminum Body Pressure Rating: 210 bar
Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:
Refer to NV13A-X-Y-Z
* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.4 kg(WITHOUT VALVES) 0.7 kg(INCLUDE VALVES)
Ductile Iron	1.15 kg(WITHOUT VALVES) 1.45 kg(INCLUDE VALVES)

* If you need the special specification. Please contact us.

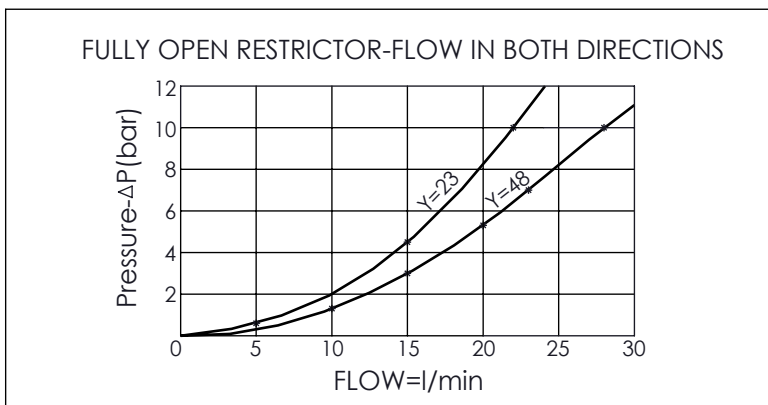

X	SELECTION FOR A PORT CONTROL
13A2	CAVITY ONLY(WITHOUT VALVE)
NV48	NV13A2048L (350bar)

Please refer to the list price of cartridge program.

Y	SELECTION FOR B PORT CONTROL
13A2	CAVITY ONLY(WITHOUT VALVE)
NV48	NV13A2048L (350bar)

Please refer to the list price of cartridge program.

Z	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM
S	DUCTILE IRON