


Ordering Code: **MH03FDT-X-Y-Z01**

Stack Height : 44.5mm

UNIT:mm

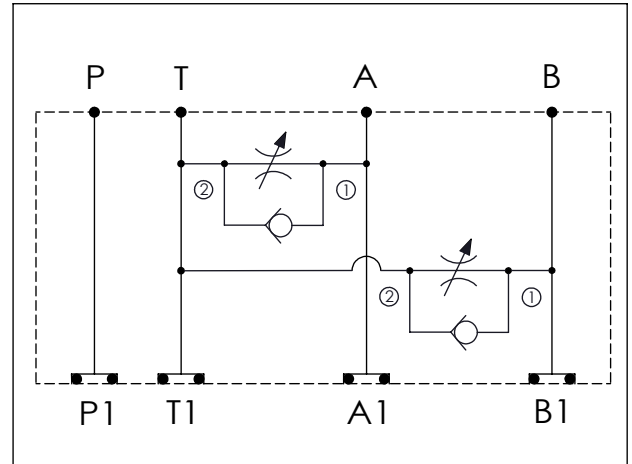

TECHNICAL DATA


Aluminum Body Pressure Rating: 210 bar
 Ductile Iron Body Pressure Rating: 350 bar
 Rated flow: 40 l/min

Cartridge Valve:
 Refer to NC13A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

| | |
|--------------|--|
| Aluminum | 0.45 kg(WITHOUT VALVES) 0.75 kg(INCLUDE VALVES) |
| Ductile Iron | 1.2 kg(WITHOUT VALVES) 1.5 kg(INCLUDE VALVES) |

* If you need the special specification. Please contact us.

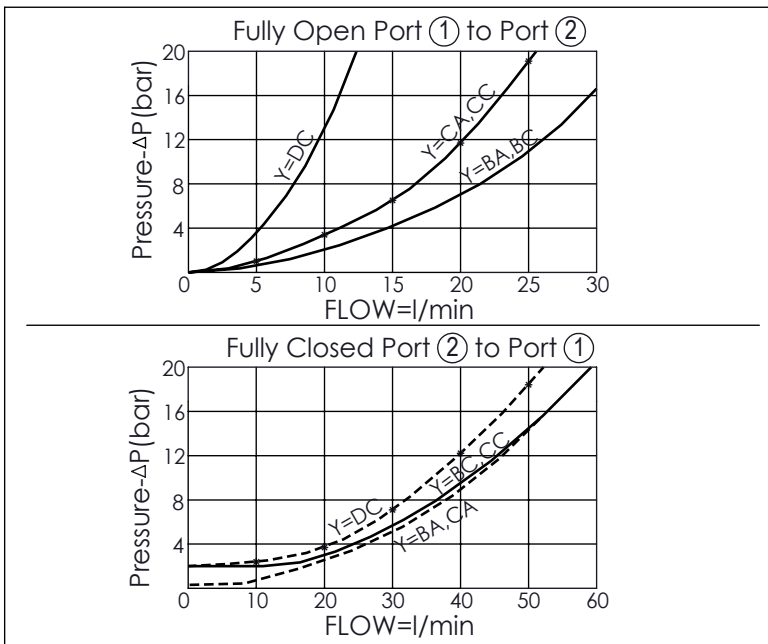

| X | SELECTION FOR A PORT CONTROL |
|------|------------------------------|
| 13A2 | CAVITY ONLY(WITHOUT VALVE) |
| NCBA | NC13A21BAL (20LPM,0.3bar) |
| NCBC | NC13A21BCL (20LPM,2.0bar) |

Please refer to the list price of cartridge program.

| Y | SELECTION FOR B PORT CONTROL |
|------|------------------------------|
| 13A2 | CAVITY ONLY(WITHOUT VALVE) |
| NCBA | NC13A21BAL(20LPM,0.3bar) |
| NCBC | NC13A21BCL(20LPM,2.0bar) |

| Z | BODY MATERIAL |
|---|------------------------|
| A | HIGH-STRENGTH ALUMINUM |
| S | DUCTILE IRON |